

# Luke Pro 50 2Way | 2X20W

## Product Reference

Environment Indoor

Installation Ceiling Recess

## Construction & Materials

Housing Mild Steel

Primary Lens PMMA

Primary Reflector -

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 2x17.5W


System Power Watts 2x20.1W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

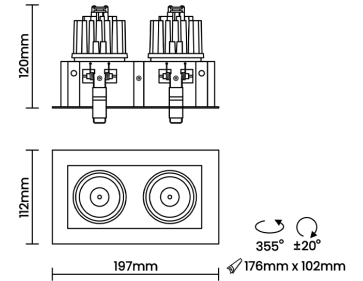

## Light Distribution

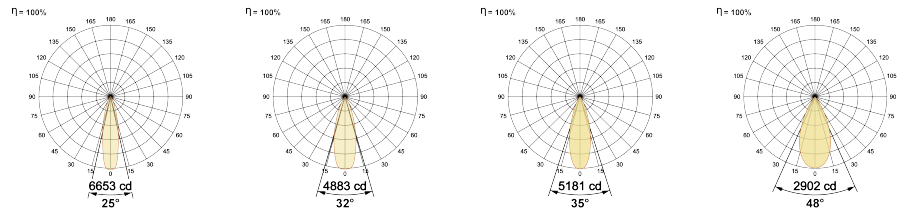

## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted Cree COB LED 36Vdc/500mA

## Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTMM,CASAMBI,Non Dimmable

## Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Luke Pro 50 2Way	2X20W	WW27K	CRI80	25°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL	
Luke Pro 50 2Way	2X20W	2x1869	93	2700K	WW27K	CRI80	25°(SS)	White SWH	Non Dimmable On/Off
		2x1930	96	3000K	WW30K	CRI90	32°(MD)	Black SBL	Phase Dimmable PDIM
		2x2030	101	4000K	NW40K		35°(WD)	Custom CSM	Dali Dimmable DDIM
		2x2070	103	5700K	CW57K		48°(VWD)		Bluetooth Dimmable BTTM
				2700K-5700K	TW				Casambi CBTM
			Warm to Dim	W2D					
Luke Pro 50 2Way	2X20W			WW27K	CRI80	25°(SS)	SWH	On/Off	

Abby Lighting & Switchgear Limited 802 A, Fortune Terraces, New Link Road, Opp City Mall, Andheri West, Mumbai - 400053, India.

frontdesk@abbylighting.com, +91 9833645212

Abby reserves the right to discontinue any product from its collection at any time whatsoever and without prior notice

www.abbylighting.com