

Birds on a Branch 3way | 3X10W

Product Reference

Environment Indoor

Installation Ceiling Surface

Construction & Materials

Housing Die Cast Aluminium, Milled Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector -

Body Finish White, Black, Custom

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Integral

LED Power Watts 3x8.8W


System Power Watts 2x10.1W

Operating Voltage Vin 220-240Vac

Power Factor p.f. >0.95

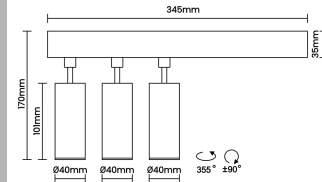

Light Distribution

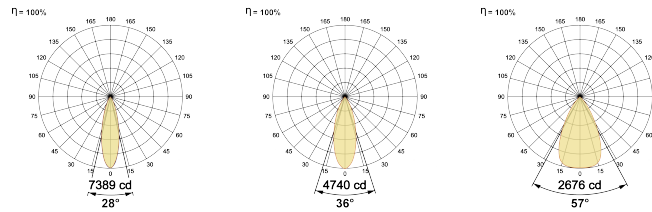

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80, CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/750mA

Controls

Standard Switchable On/Off

Optional PDIM, DDIM, BTM, CASAMBI, Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Birds on a Branch 3way	3x10W	2700K	CRI80	28°	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Birds on a Branch 3way	3x10W	3x808	80	2700K 2700K	CRI80	28° 28°	White SWH	Non Dimmable On/Off
		3x828	82	3000K 3000K	CRI90	36° 36°	Black SBL	Phase Dimmable PDIM
		3x869	86	4000K 4000K		57° 57°	Custom CSM	Dali Dimmable DDIM
		3x889	88	5700K 5700K				Bluetooth Dimmable BTM
							Casambi CBTM	
Birds on a Branch 3way	3x10W			2700K	CRI80	28°	SWH	On/Off

Abby reserves the right to discontinue any product from its collection at any time whatsoever and without prior notice

frontdesk@abbylighting.com, +91 9833645212

www.abbylighting.com