

# Birds on a Branch 3way | 3X10W

## Product Reference

Environment Indoor

Installation Ceiling Surface

## Construction & Materials

Housing Die Cast Aluminium, Milled Aluminium

Primary Lens PMMA

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White, Black, Custom

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Integral

LED Power Watts 3x8.8W

System Power Watts 2x10.1W

Operating Voltage Vin 220-240Vac


Power Factor p.f. >0.95

## Ordering Details


| Code Example: | Name                          | Watt         | CCT          | CRI          | Angle      | Finish     | Control       |
|---------------|-------------------------------|--------------|--------------|--------------|------------|------------|---------------|
|               | <b>Birds on a Branch 3way</b> | <b>3x10W</b> | <b>WW27K</b> | <b>CRI80</b> | <b>28°</b> | <b>SWH</b> | <b>On/Off</b> |

Select one from each column with highlighted values to create the ordering code

| NAME                          | WATT         | LUMEN | EFFICACY | CCT          | CRI          | ANGLE          | FINISH     | CONTROL            |
|-------------------------------|--------------|-------|----------|--------------|--------------|----------------|------------|--------------------|
| <b>Birds on a Branch 3way</b> | <b>3x10W</b> | 3x808 | 80       | 2700K        | <b>WW27K</b> | <b>28° 28°</b> | White      | Non Dimmable       |
|                               |              | 3x828 | 82       | 3000K        | <b>WW30K</b> | 36° 36°        | Black      | Phase Dimmable     |
|                               |              | 3x869 | 86       | 4000K        | <b>NW40K</b> | 57° 57°        | Custom     | Dali Dimmable      |
|                               |              | 3x889 | 88       | 5700K        | <b>CW57K</b> |                |            | Bluetooth Dimmable |
|                               |              |       |          |              |              |                | Casambi    | CBTM               |
| <b>Birds on a Branch 3way</b> | <b>3x10W</b> |       |          | <b>WW27K</b> | <b>CRI80</b> | <b>28°</b>     | <b>SWH</b> | <b>On/Off</b>      |

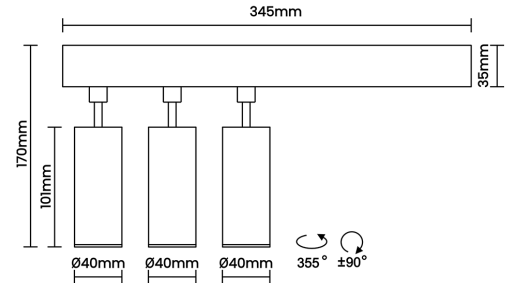

## Light Distribution

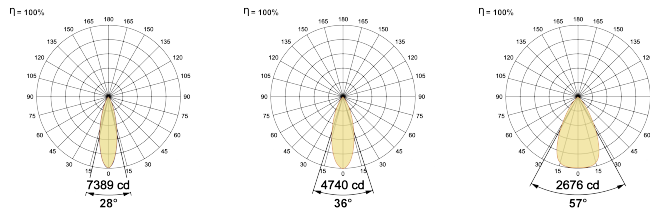

## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80, CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/750mA

## Controls

Standard Switchable On/Off

Optional PDIM, DDIM, BTM, CASAMBI, Non Dimmable

