

220V 240V 50/60Hz | CRI 80 | IP20 | L80B10 >50,000h | MacAdam Step 3

Optional: Dimmable | Tunable White | CRI 90

# T Zee MPD 60 | 14W

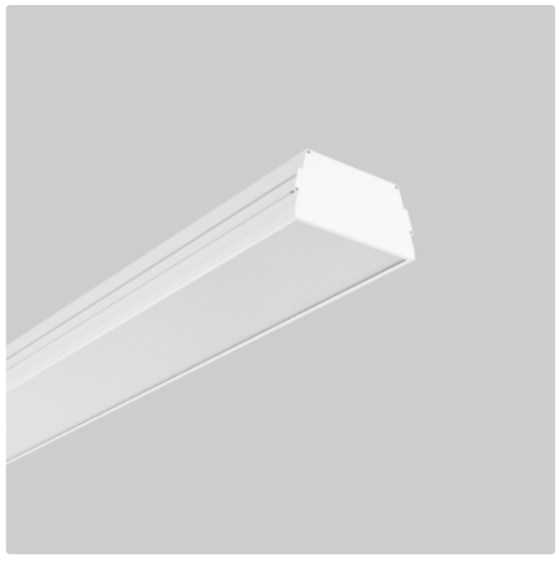

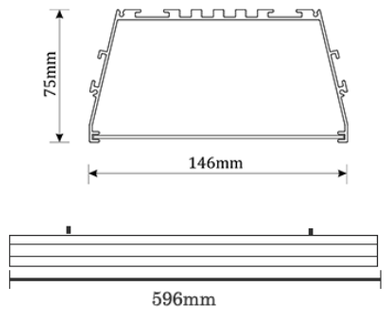


### Product Reference

Environment Indoor

Installation Ceiling Recess

### Construction & Materials

Housing Extruded and Sheet Aluminium

Primary Lens -

Primary Reflector White Optics

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser Microprismatic

Antiglare Baffle -

### Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

### Optical System

Beam Direction Fixed

Tilt -

Swivel -

### Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Integral

LED Power Watts 12.0W

System Power Watts 13.8W

Operating Voltage Vin 220-240Vac

Power Factor p.f. >0.95

### Light Distribution

### LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Osram/Samsung Mid power LED array 32V-36Vdc/350mA

### Controls

Standard Switchable On/Off

Optional PDIM,DDIM,CASAMBI

### Ordering Details

| Code Example: | Name | Watt | CCT | CRI | Angle | Finish | Control |
|---|---|---|---|---|---|---|---|
| | **T Zee MPD 60** | **14W** | **WW27K** | **CRI80** | **79°** | **SWH** | |

Select one from each column with highlighted values to create the ordering code

| NAME | WATT | LUMEN | EFFICACY | CCT | | CRI | ANGLE | FINISH | | CONTROL |
|---|---|---|---|---|---|---|---|---|---|---|
| **T Zee MPD 60** | **14W** | 1366 | 99 | 2700K | **WW27K** | **CRI80** | 79° | White | **SWH** | |
| | | 1408 | 102 | 3000K | **WW30K** | CRI90 | | Black | **SBL** | |
| | | 1477 | 107 | 4000K | **NW40K** | | | Custom | **CSM** | |
| | | 1504 | 109 | 5700K | **CW57K** | | | | | |
| | | | | 2700K-5700K | **TW** | | | | | |
| **T Zee MPD 60** | **14W** | | | **WW27K** | | **CRI80** | **79°** | **SWH** | | |