
ABBY LIGHTING

220V 240V 50/60Hz | CRI 80 | IP20 | L80B10 >50,000h

Optional: Dimmable | Tunable White | CRI 90

T Zee MPD 120 | 28W



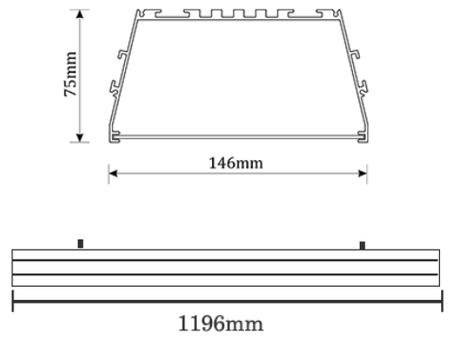

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Extruded and Sheet Aluminium

Primary Lens -

Primary Reflector White Optics

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser Microprismatic

Antiglare Baffle -

Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed

Tilt -

Swivel -

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Integral

LED Power Watts 24.0W

System Power Watts 27.6W

Operating Voltage Vin 220-240Vac

Power Factor p.f. >0.95

Light Distribution

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Osram/Samsung Mid power LED array 32V-36Vdc/700mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,CASAMBI

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	T Zee MPD 120	**28W**	**WW27K**	**CRI80**	**79°**	**SWH**	

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL
T Zee MPD 120	**28W**	2732	99	2700K	**WW27K**	**CRI80**	79°	White	**SWH**	
		2815	102	3000K	**WW30K**	CRI90		Black	**SBL**	
		2953	107	4000K	**NW40K**			Custom	**CSM**	
		3008	109	5700K	**CW57K**					
				2700K-5700K	**TW**					
T Zee MPD 120	**28W**			**WW27K**		**CRI80**	**79°**	**SWH**		