
ABBY LIGHTING

220V 240V 50/60Hz | CRI 80 | IP20 | L80B10 >50,000h | MacAdam Step 3

Optional: Dimmable | Tunable White | CRI 90

T Zee Dropdown OPD 180 | 42W



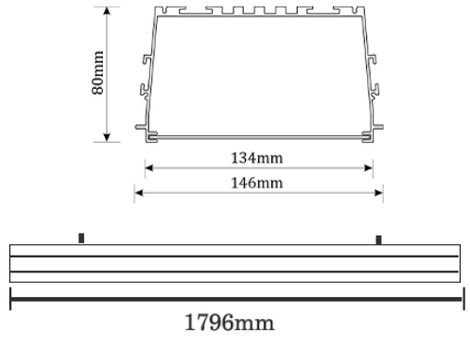

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Extruded and Sheet Aluminium

Primary Lens -

Primary Reflector White Optics

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser Premium high-transmission opal

Antiglare Baffle -

Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction General Diffuse

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Integral

LED Power Watts 35.4W

System Power Watts 40.7W

Operating Voltage Vin 220-240Vac

Power Factor p.f. >0.95

Light Distribution

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Osram/Samsung Mid power LED array 32V-36Vdc/1050mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	T Zee Dropdown OPD 180	**42W**	**WW27K**	**CRI80**	**101° general diffuse**	**SWH**	**On/Off**

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
T Zee Dropdown OPD 180	**42W**	4192	103	2700K	**WW27K**	**CRI80**	101° general diffuse	White	**SWH**	Non Dimmable	**On/Off**
		4314	106	3000K	**WW30K**	CRI90		Black	**SBL**	Phase Dimmable	**PDIM**
		4518	111	4000K	**NW40K**			Custom	**CSM**	Dali Dimmable	**DDIM**
		4640	114	5700K	**CW57K**					Casambi	**CBTM**
				2700K-5700K	**TW**						
T Zee Dropdown OPD 180	**42W**			**WW27K**		**CRI80**	**101° general diffuse**	**SWH**		**On/Off**	