

Mojo 50 HGB WD | 18W

Product Reference

Environment Indoor
Installation Track Mounted

Construction & Materials

Housing Aluminium
Primary Lens -
Primary Reflector PC metallised
Secondary Reflector Anodised
Body Finish White,Black
Diffuser -
Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium
Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable
Tilt Yes
Swivel Yes

Electrical System


Driven with Constant Current Driver
Input Voltage/Hz 220V- 240V/50-60Hz
Control Gear Included
Mounting Integral
LED Power Watts 15.7W
System Power Watts 18.0W
Operating Voltage Vin 220-240Vac
Power Factor p.f. >0.95

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Mojo 50 HGB WD	18W	WW27K	CRI80	42°	SWH	DDIM

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Mojo 50 HGB WD	18W	92	1656	2700K	WW27K	42°	White	Dali Dimmable
		95	1710	3000K	WW30K		Black	Bluetooth Dimmable
		100	1800	4000K	NW40K			Casambi
		102	1836	5700K	CW57K			
Mojo 50 HGB WD	18W			WW27K	CRI80	42°	SWH	DDIM

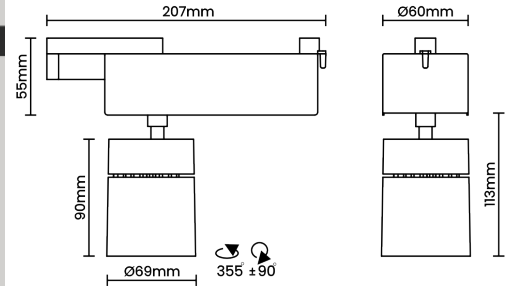

Light Distribution

LED Technology

Binning 3 Step MacAdam
LED Life Time @ L80/B10 >50000 hours
Colour Rendering (CRI) CRI80,CRI90
Led Type COB
LED Fitted Cree COB LED 33V-36Vdc/450mA

Controls

Standard Switchable On/Off
Optional DDIM,BTTM,CASAMBI