

Mojo 65 ITA VWD | 20W

Product Reference

Environment Indoor

Installation Track Mounted

Construction & Materials

Housing Aluminium

Primary Lens -

Primary Reflector PC metallised

Secondary Reflector Anodised

Body Finish White,Black

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Integral

LED Power Watts 17.6W

System Power Watts 20.2W

Operating Voltage Vin 220-240Vac


Power Factor p.f. >0.95

Ordering Details

| Code Example: | Name | Watt | CCT | CRI | Angle | Finish | Control |
|---------------|-----------------|------|-------|-------|-------|--------|---------|
| | Mojo 65 ITA VWD | 20W | WW27K | CRI80 | 51° | SWH | On/Off |

Select one from each column with highlighted values to create the ordering code

| NAME | WATT | LUMEN | EFFICACY | CCT | | CRI | ANGLE | FINISH | | CONTROL | |
|-----------------|------|-------|----------|-------|-------|-------|-------|--------|-----|--------------|--------|
| Mojo 65 ITA VWD | 20W | 2101 | 104 | 2700K | WW27K | CRI80 | 51° | White | SWH | Non Dimmable | On/Off |
| | | 2161 | 107 | 3000K | WW30K | CRI90 | | Black | SBL | | |
| | | 2262 | 112 | 4000K | NW40K | | | | | | |
| | | 2303 | 114 | 5700K | CW57K | | | | | | |
| Mojo 65 ITA VWD | 20W | | | WW27K | | CRI80 | 51° | SWH | | On/Off | |

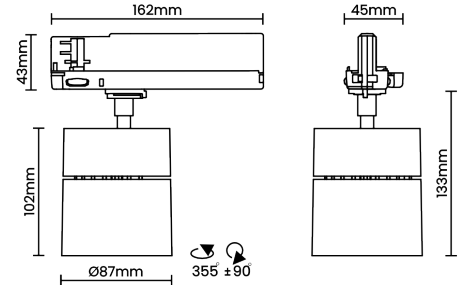

Light Distribution

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted Cree COB LED 33V-36Vdc/500mA

Controls

Standard Switchable On/Off

Optional -