

Sigma 60 TL WW | 10W

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Aluminium

Primary Lens -

Primary Reflector PC metallised

Secondary Reflector Anodised

Body Finish White,Black

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Extruded Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed Asymmetric

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included



Mounting Integral

LED Power Watts 8.9W

System Power Watts 10.2W

Operating Voltage Vin 220-240Vac

Power Factor p.f. >0.95

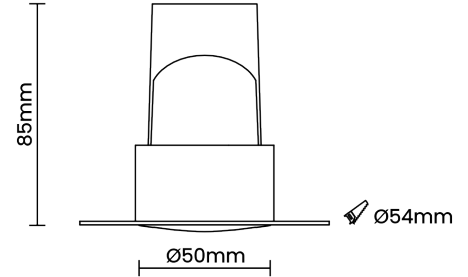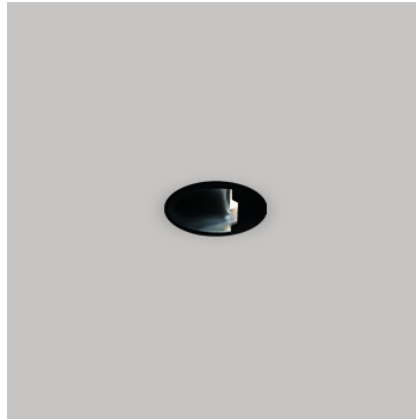

Light Distribution

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted Cree COB LED 33V-36Vdc/250mA

Controls

Standard Switchable On/Off

Optional DDIM

Ordering Details

| Code Example: | Name | Watt | CCT | CRI | Angle | Finish | Control |
|---------------|-----------------------|------------|--------------|--------------|-------------------|------------|---------------|
| | Sigma 60 TL WW | 10W | WW27K | CRI80 | Asymmetric | SWH | On/Off |

Select one from each column with highlighted values to create the ordering code

| NAME | WATT | LUMEN | EFFICACY | CCT | CRI | ANGLE | FINISH | CONTROL |
|-----------------------|------------|-------|----------|--------------------|--------------|-------------------|------------------|----------------------------|
| Sigma 60 TL WW | 10W | 734 | 72 | 2700K WW27K | CRI80 | Asymmetric | White SWH | Non Dimmable On/Off |
| | | 755 | 74 | 3000K WW30K | CRI90 | | Black SBL | Dali Dimmable DDIM |
| | | 796 | 78 | 4000K NW40K | | | | |
| | | 816 | 80 | 5700K CW57K | | | | |
| Sigma 60 TL WW | 10W | | | WW27K | CRI80 | Asymmetric | SWH | On/Off |