

Brava 88 | 15W

Product Reference

Environment Outdoor

Installation Ceiling Surface

Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector PC metallised

Body Finish Black,Grey

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Integral

LED Power Watts 12.8W


System Power Watts 14.7W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

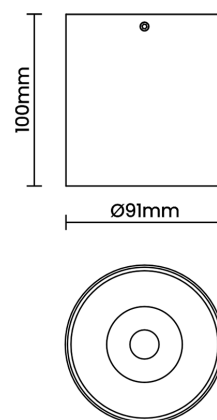

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type -

LED Fitted CREE COB LED 36Vdc/350mA

Controls

Standard Switchable On/Off

Optional DDIM

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Brava 88	15W	WW27K	CRI80	31°(WD)	SBL	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
Brava 88	15W	1676	114	2700K	WW27K	CRI80	31°(WD)	Black	SBL	Non Dimmable	On/Off
		1720	117	3000K	WW30K	CRI90	63°(VWD)	Grey	GGT	Dali Dimmable	DDIM
		1793	122	4000K	NW40K						
		1838	125	5700K	CW57K						
Brava 88	15W			WW27K		CRI80	31°(WD)	SBL		On/Off	