
ABBY LIGHTING

220V 240V 50/60Hz | IP65 | L80B10 >50,000h | MacAdam Step 3 | CRI 90

Brava 108 | 24W



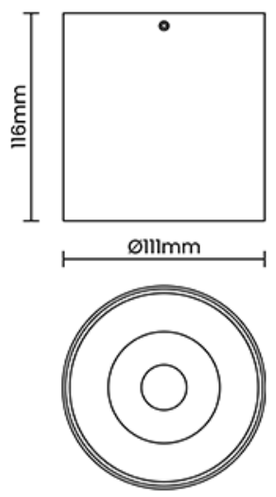

Product Reference

Environment Outdoor

Installation Ceiling Surface

Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector PC metallised

Body Finish Black,Grey

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Integral


LED Power Watts 21.1W

System Power Watts 24.2W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type -

LED Fitted CREE COB LED 36Vdc/600mA

Controls

Standard Switchable On/Off

Optional DDIM

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Brava 108	**24W**	**WW27K**	**CRI80**	**36°(WD)**	**SBL**	**On/Off**

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
Brava 108	**24W**	2686	111	2700K	**WW27K**	**CRI80**	36°(WD)	Black	**SBL**	Non Dimmable	**On/Off**
		2759	114	3000K	**WW30K**	CRI90	67°(VWD)	Grey	**GGT**	Dali Dimmable	**DDIM**
		2880	119	4000K	**NW40K**						
		2952	122	5700K	**CW57K**						
Brava 108	**24W**			**WW27K**		**CRI80**	**36°(WD)**	**SBL**		**On/Off**	

Abby Lighting & Switchgear Limited 802 A, Fortune Terraces, New Link Road, Opp City Mall, Andheri West, Mumbai - 400053, India.
frontdesk@abbylighting.com, +91 7304623220

Abby reserves the right to discontinue any product from its collection at any time whatsover and without prior notice