

iNline P 180 | 60W

Product Reference

Environment Indoor
 Installation Ceiling Suspended

Construction & Materials

Housing Extruded Aluminium
 Primary Lens -
 Primary Reflector -
 Secondary Reflector -
 Body Finish White,Black,Custom
 Diffuser Premium high-transmission opal
 Antiglare Baffle -

Thermal Management



Heat Sink Material Aluminium
 Cooling Technique Passive Cooling

Optical System


Beam Direction General Diffuse
 Tilt No
 Swivel No

Electrical System

Driven with Constant Current Driver
 Input Voltage/Hz 220V- 240V/50-60Hz
 Control Gear Included
 Mounting Integral
 LED Power Watts 51.0W
 System Power Watts 58.65W
 Operating Voltage Vin 220-240 Vac
 Power Factor p.f. > 0.95

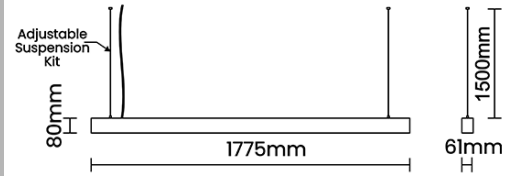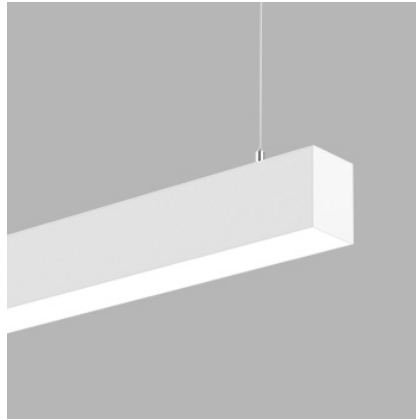

Light Distribution



LED Technology

Binning 3 Step MacAdam
 LED Life Time @ L80/B10 >50000 hours
 Colour Rendering (CRI) CRI80,CRI90
 Led Type SMD mid power
 LED Fitted Osram/Samsung Mid power LED array 32V-38Vdc/1400mA

Controls

Standard Switchable On/Off
 Optional DDIM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	iNline P 180	60W	WW27K	CRI80	103°	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
iNline P 180	60W	5924	101	2700K	WW27K	103°	White	Non Dimmable
		6099	104	3000K	WW30K		Black	Dali Dimmable
		6452	110	4000K	NW40K		Custom	Casambi
		6686	114	5700K	CW57K		CSM	CBTM
				2700K-5700K	TW			
iNline P 180	60W			WW27K	CRI80	103°	SWH	on/off