

## iNline R 60 | 10W

### Product Reference

Environment Indoor

Installation Ceiling Recess

### Construction & Materials

Housing Extruded Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser Premium high-transmission opal

Antiglare Baffle -

### Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

### Optical System

Beam Direction General Diffuse

Tilt No

Swivel No

### Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included




Mounting Integral

LED Power Watts 8.5W

System Power Watts 9.75W

Operating Voltage Vin -

Power Factor p.f. > 0.95

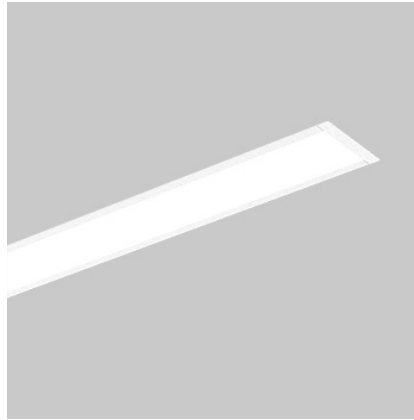

### LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Samsung Mid power LED array 32V-38Vdc/250mA

### Controls

Standard Switchable On/Off

Optional DDIM,CASAMBI,Non Dimmable

### Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	<b>iNline R 60</b>	<b>10W</b>	<b>WW27K</b>	<b>CRI80</b>	<b>103°</b>	<b>SWH</b>	<b>On/Off</b>

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL	
<b>iNline R 60</b>	<b>10W</b>	1102	113	2700K	<b>WW27K</b>	<b>103°</b>	White	Non Dimmable	
			1131	116	3000K		<b>WW30K</b>	Black	Dali Dimmable
			1200	123	4000K		<b>NW40K</b>	Custom	Casambi
			1248	128	5700K		<b>CW57K</b>		
					2700K-5700K		<b>TW</b>		
<b>iNline R 60</b>	<b>10W</b>			<b>WW27K</b>	<b>CRI80</b>	<b>103°</b>	<b>SWH</b>	<b>On/Off</b>	