

iSoft P 56 | 14W

Product Reference

Environment Indoor
Installation Ceiling Suspended

Construction & Materials

Housing Extruded Aluminium
Primary Lens -
Primary Reflector -
Secondary Reflector -
Body Finish White,Black,Custom
Diffuser Opal PC
Antiglare Baffle -

Thermal Management

Heat Sink Material Extruded Aluminium
Cooling Technique Passive Cooling

Optical System

Beam Direction General Diffuse
Tilt No
Swivel No

Electrical System




Driven with Constant Current Driver
Input Voltage/Hz 220V- 240V/50-60Hz
Control Gear Included
Mounting Integral
LED Power Watts 11.5W
System Power Watts 13.2W
Operating Voltage Vin 220-240 Vac
Power Factor p.f. > 0.95

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	iSoft P 56	14W	WW27K	CRI80	109°	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
iSoft P 56	14W	1162	88	2700K	WW27K	CRI80	109°	White	SWH	Non Dimmable	On/Off
		1201	91	3000K	WW30K	CRI90		Black	SBL	Dali Dimmable	DDIM
		1267	96	4000K	NW40K			Custom	CSM	Casambi	CBTM
		1294	98	5700K	CW57K						
iSoft P 56	14W			WW27K		CRI80	109°	SWH		On/Off	

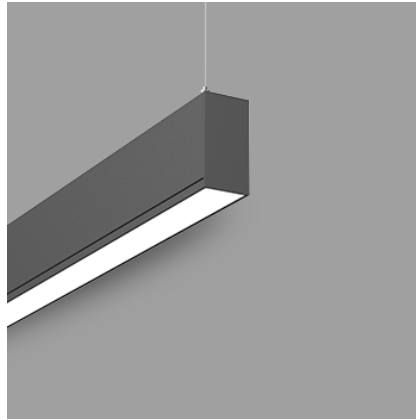

LED Technology

Binning 3 Step MacAdam
LED Life Time @ L70/B10 >50000 hours
Colour Rendering (CRI) CRI80,CRI90
Led Type SMD mid power
LED Fitted Samsung Mid power LED array 34-36Vdc/350mA

Controls

Standard Switchable On/Off
Optional DDIM,CASAMBI,Non Dimmable