

iPro R 112 | 32W

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Extruded Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector Black Raster - PC, White Raster - PC

Body Finish White, Black, Custom

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Extruded Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Remote

LED Power Watts 26.8W

System Power Watts 30.8W

Operating Voltage Vin 220-240 Vac


Power Factor p.f. > 0.95

Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	iPro R 112	32W	WW27K	CRI80	52°(WD)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL	
iPro R 112	32W	3480	113	2700K	WW27K	CRI80	52°(WD) 52	White SWH	Non Dimmable On/Off
		3573	116	3000K	WW30K	CRI90	82°(VWD)	Black SBL	Dali Dimmable DDIM
		3758	122	4000K	NW40K			Custom CSM	Bluetooth Dimmable BTTM
		3819	124	5700K	CW57K				Casambi CBTM
				2700K-5700K	TW				
iPro R 112	32W			WW27K	CRI80	52°(WD)	SWH	On/Off	

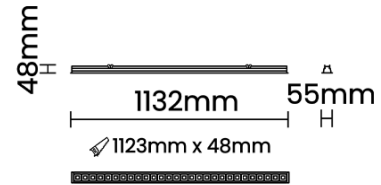

Light Distribution

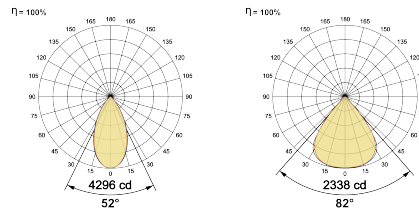

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80, CRI90

Led Type SMD

LED Fitted Osram/Samsung Mid power LED array 39-42Vdc/700mA

Controls

Standard Switchable On/Off

Optional DDIM, BTTM, CASAMBI, Non Dimmable