

ZuG Dark P 56 | 12W

Product Reference

Environment Indoor
 Installation Ceiling Suspended

Construction & Materials

Housing Aluminium Extrusion
 Primary Lens PMMA
 Primary Reflector -
 Secondary Reflector PC Black Cover
 Body Finish White,Black
 Diffuser -
 Antiglare Baffle Black,White,Custom

Thermal Management


Heat Sink Material Aluminium
 Cooling Technique Passive Cooling

Optical System


Beam Direction Fixed
 Tilt No
 Swivel No

Electrical System

Driven with Constant Current Driver
 Input Voltage/Hz 220V- 240V/50-60Hz
 Control Gear Included
 Mounting Integral
 LED Power Watts 10.3W
 System Power Watts 11.8W
 Operating Voltage Vin 220-240 Vac
 Power Factor p.f. > 0.95

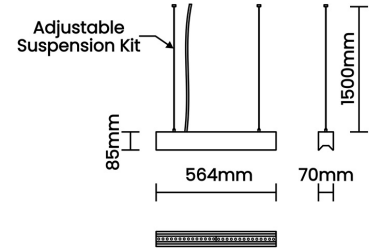

Light Distribution

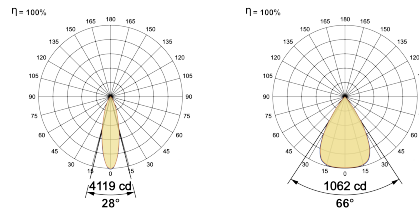

LED Technology

Binning 3 Step MacAdam
 LED Life Time @ L80/B10 >50000 hours
 Colour Rendering (CRI) CRI80,CRI90
 Led Type SMD high power
 LED Fitted Osram/Cree 3030 LED array 39V-42Vdc/250mA

Controls

Standard Switchable On/Off
 Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	ZuG Dark P 56	12W	WW27K	CRI80	28°(MD)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
ZuG Dark P 56	12W	1310	111	2700K	WW27K	CRI80	28°(MD)	Non Dimmable On/Off
		1345	114	3000K	WW30K	CRI90	66°(VWD)	Phase Dimmable PDIM
		1416	120	4000K	NW40K			Dali Dimmable DDIM
		1440	122	5700K	CW57K			Bluetooth Dimmable BTTM Casambi CBTM
ZuG Dark P 56	12W			WW27K	CRI80	28°(MD)	SWH	On/Off

