

# ZuG Dark P 168 | 74W

## Product Reference

Environment Indoor  
Installation Ceiling Suspended

## Construction & Materials

Housing Aluminium Extrusion  
Primary Lens PMMA  
Primary Reflector -  
Secondary Reflector PC Black Cover  
Body Finish White,Black  
Diffuser -  
Antiglare Baffle Black,White,Custom

## Thermal Management

Heat Sink Material Aluminium  
Cooling Technique Passive Cooling

## Optical System

Beam Direction Fixed  
Tilt No  
Swivel No

## Electrical System


Driven with Constant Current Driver  
Input Voltage/Hz 220V- 240V/50-60Hz  
Control Gear Included  
Mounting Integral  
LED Power Watts 63.3W  
System Power Watts 72.8W  
Operating Voltage Vin 220-240 Vac  
Power Factor p.f. > 0.95

## Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	<b>ZuG Dark P 168</b>	<b>74W</b>	<b>WW27K</b>	<b>CRI80</b>	<b>28°(MD)</b>	<b>SWH</b>	<b>On/Off</b>

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
<b>ZuG Dark P 168</b>	<b>74W</b>	7134	98	2700K	<b>WW27K</b>	<b>CRI80</b>	28°(MD) 28°(MD)	White <b>SWH</b> Non Dimmable <b>On/Off</b>
		7353	101	3000K	<b>WW30K</b>	CRI90	66°(VWD)	Black <b>SBL</b> Phase Dimmable <b>PDIM</b>
		7717	106	4000K	<b>NW40K</b>			Dali Dimmable <b>DDIM</b>
		7862	108	5700K	<b>CW57K</b>			Bluetooth Dimmable <b>BTTM</b> Casambi <b>CBTM</b>
<b>ZuG Dark P 168</b>	<b>74W</b>			<b>WW27K</b>	<b>CRI80</b>	<b>28°(MD)</b>	<b>SWH</b>	<b>On/Off</b>



## Light Distribution

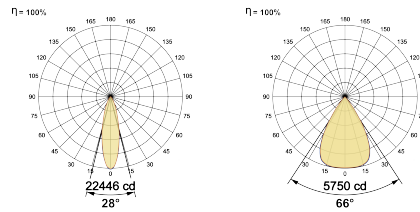

## LED Technology

Binning 3 Step MacAdam  
LED Life Time @ L70/B10 >50000 hours  
Colour Rendering (CRI) CRI80,CRI90  
Led Type SMD high power  
LED Fitted Cree 3030 LED array 39V-42Vdc/1550mA

## Controls

Standard Switchable On/Off  
Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable