

## Bling F | 5W

### Product Reference

Environment Indoor

Installation Ceiling Recess

### Construction & Materials

Housing Milled Aluminium

Primary Lens -

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

### Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

### Optical System

Beam Direction Fixed

Tilt No

Swivel No

### Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included



Mounting Remote

LED Power Watts 3.5W


System Power Watts 4.4W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.5

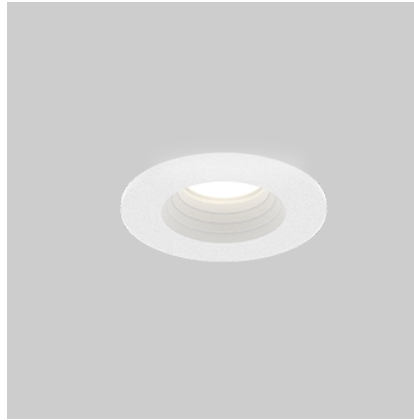

### Light Distribution



### LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/130mA

### Controls

Standard Switchable On/Off

Optional PDIM,DDIM,CASAMBI,Non Dimmable

### Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	<b>Bling F</b>	<b>5W</b>	<b>WW27K</b>	<b>CRI80</b>	<b>33°(MD)</b>	<b>SWH</b>	<b>On/Off</b>

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
<b>Bling F</b>	<b>5W</b>	330	75	2700K	<b>WW27K</b>	<b>33°(MD)</b>	White	Non Dimmable
		352	80	3000K	<b>WW30K</b>		Black	Phase Dimmable
		374	85	4000K	<b>NW40K</b>		Custom	Dali Dimmable
		383	87	5700K	<b>CW57K</b>			Casambi
					Warm to Dim		<b>W2D</b>	
<b>Bling F</b>	<b>5W</b>			<b>WW27K</b>	<b>CRI80</b>	<b>33°(MD)</b>	<b>SWH</b>	<b>on/Off</b>