

## Dot D | 5W

### Product Reference

Environment Indoor  
 Installation Ceiling Recess

### Construction & Materials

Housing Milled Aluminium  
 Primary Lens PMMA  
 Primary Reflector PC metallised  
 Secondary Reflector -  
 Body Finish White,Black,Custom  
 Diffuser -  
 Antiglare Baffle -

### Thermal Management



Heat Sink Material Aluminium  
 Cooling Technique Passive Cooling

### Optical System


Beam Direction Fixed  
 Tilt No  
 Swivel No

### Electrical System

Driven with Constant Current Driver  
 Input Voltage/Hz 220V- 240V/50-60Hz  
 Control Gear Included  
 Mounting Remote  
 LED Power Watts 3.6W  
 System Power Watts 4.5W  
 Operating Voltage Vin 220-240 Vac  
 Power Factor p.f. > 0.5

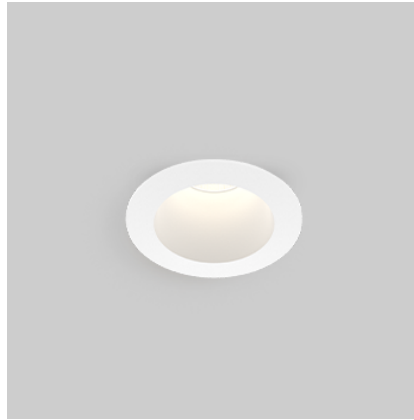

### Light Distribution



### LED Technology

Binning 3 Step MacAdam  
 LED Life Time @ L70/B10 >50000 hours  
 Colour Rendering (CRI) CRI90  
 Led Type SMD high power  
 LED Fitted CREE COB LED 36Vdc/130mA

### Controls

Standard Switchable On/Off  
 Optional PDIM,DDIM,Non Dimmable

### Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	<b>Dot D</b>	<b>5W</b>	<b>WW27K</b>	<b>CRI90</b>	<b>32°(MD)</b>	<b>SWH</b>	<b>On/Off</b>

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL	
<b>Dot D</b>	<b>5W</b>	320	71	2700K	<b>CRI90</b>	32°(MD)	White <b>SWH</b>	Non Dimmable	<b>On/Off</b>
		329	73	3000K				Phase Dimmable	<b>PDIM</b>
		347	77	4000K				Dali Dimmable	<b>DDIM</b>
		356	79	5700K					
<b>Dot D</b>	<b>5W</b>			<b>WW27K</b>	<b>CRI90</b>	<b>32°(MD)</b>	<b>SWH</b>	<b>On/Off</b>	