

Dot DM | 3W

Product Reference

 Environment Indoor
 Installation Ceiling Recess

Construction & Materials

 Housing Milled Aluminium
 Primary Lens PMMA
 Primary Reflector PC metallised
 Secondary Reflector -
 Body Finish White,Black,Custom
 Diffuser -
 Antiglare Baffle -

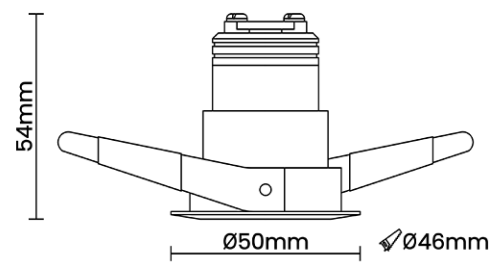
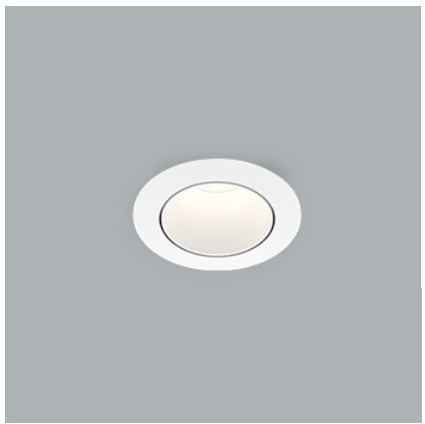
Thermal Management

 Heat Sink Material Aluminium
 Cooling Technique Passive Cooling

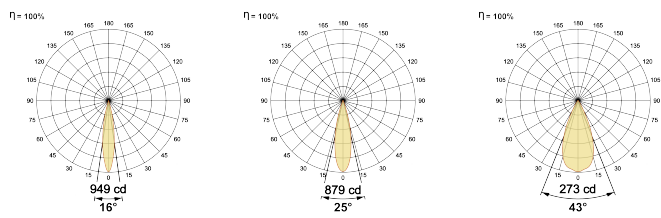
Optical System

 Beam Direction Adjustable
 Tilt Yes
 Swivel No

Electrical System

 Driven with Constant Current Driver
 Input Voltage/Hz 220V- 240V/50-60Hz
 Control Gear Included
 Mounting Remote
 LED Power Watts 2.2W
 System Power Watts 2.9W
 Operating Voltage Vin 220-240 Vac
 Power Factor p.f. > 0.5


Light Distribution



LED Technology

 Binning 3 Step MacAdam
 LED Life Time @ L80/B10 >50000 hours
 Colour Rendering (CRI) CRI90
 Led Type SMD mid power
 LED Fitted -

Controls

 Standard Switchable On/Off
 Optional PDIM,DDIM,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Dot DM	3W	WW27K	CRI90	16°(ss)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE		FINISH		CONTROL	
Dot DM	3W	197	68	2700K	WW27K	CRI90	16°(SS)	25°(MD)	White	SWH	Non Dimmable	On/Off
		206	71	3000K	WW30K		25°(MD)	Black	SBL	Phase Dimmable	PDIM	
		223	77	4000K	NW40K		43°(WD)	Custom	CSM	Dali Dimmable	DDIM	
		232	80	5700K	CW57K							
Dot DM	3W			WW27K		CRI90	16°(SS)		SWH		On/off	