

Dot Mini | 3W

Product Reference

Environment Indoor
 Installation Ceiling Recess

Construction & Materials

Housing Milled Aluminium
 Primary Lens PMMA
 Primary Reflector PC metallised
 Secondary Reflector -
 Body Finish White,Black,Custom
 Diffuser -
 Antiglare Baffle -

Thermal Management

Heat Sink Material Aluminium
 Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed
 Tilt No
 Swivel No

Electrical System


Driven with Constant Current Driver
 Input Voltage/Hz 220V- 240V/50-60Hz
 Control Gear Included
 Mounting Remote
 LED Power Watts 2.7W
 System Power Watts 3.4W
 Operating Voltage Vin 220-240 Vac
 Power Factor p.f. > 0.95

Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Dot Mini	3W	WW27K	CRI90	28°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Dot Mini	3W	173	51	2700K	WW27K	28°(SS) 32°(MD)	White	Non Dimmable On/Off
		180	53	3000K	WW30K	32°(MD)	Black	Phase Dimmable PDIM
		190	56	4000K	NW40K	38°(WD)	Custom	Dali Dimmable DDIM
		194	57	5700K	CW57K	42°(VWD)		
Dot Mini	3W			WW27K	CRI90	28°(SS)	SWH	On/Off

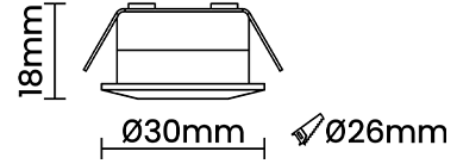

Light Distribution

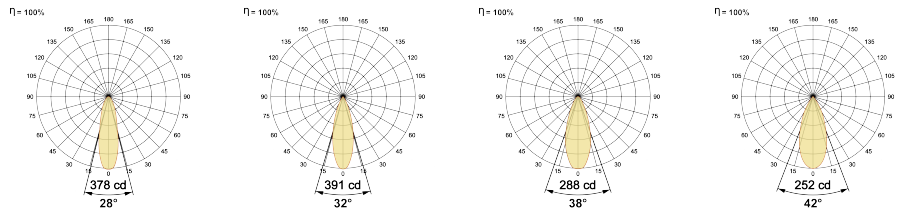

LED Technology

Binning 3 Step MacAdam
 LED Life Time @ L70/B10 >50000 hours
 Colour Rendering (CRI) CRI90
 Led Type SMD high power
 LED Fitted Osram High Power LED 2.5V-3Vdc/700mA

Controls

Standard Switchable On/Off
 Optional PDIM,DDIM,Non Dimmable