

# Dark Knight 2 | 5W

## Product Reference

Environment Indoor

Installation Ceiling Recess

## Construction & Materials

Housing Die Cast Aluminium

Primary Lens -

Primary Reflector PC metallised

Secondary Reflector Black Raster – ABS

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Fixed

Tilt No

Swivel No

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included






Mounting Remote

LED Power Watts 4.4W

System Power Watts 5.5W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. &gt; 0.95

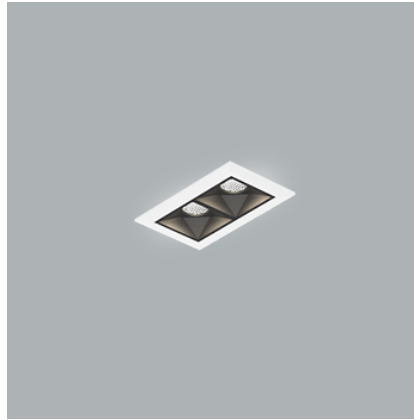

## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 &gt;50000 hours

Colour Rendering (CRI) CRI90

Led Type SMD high power

LED Fitted -

## Controls

Standard Switchable On/Off

Optional PDIM,DDIM,Non Dimmable

## Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	<b>Dark Knight 2</b>	<b>5W</b>	<b>WW27K</b>	<b>CRI90</b>	<b>20°(ss)</b>	<b>SWH</b>	<b>On/Off</b>

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
<b>Dark Knight 2</b>	<b>5W</b>	330	60	2700K	<b>CRI90</b>	20°(SS)	White	Non Dimmable
		341	62	3000K		30°(MD)	Black	Phase Dimmable
		369	67	4000K		49°(WD)	Custom	Dali Dimmable
		380	69	5700K				
<b>Dark Knight 2</b>	<b>5W</b>			<b>WW27K</b>	<b>CRI90</b>	<b>20°(SS)</b>	<b>SWH</b>	<b>On/Off</b>