

# Dark Knight 2 | 5W

## Product Reference

Environment Indoor  
Installation Ceiling Recess

## Construction & Materials

Housing Die Cast Aluminium  
Primary Lens -  
Primary Reflector PC metallised  
Secondary Reflector Black Raster - ABS  
Body Finish White,Black,Custom  
Diffuser -  
Antiglare Baffle -

## Thermal Management



Heat Sink Material Die cast Aluminium  
Cooling Technique Passive Cooling

## Optical System


Beam Direction Fixed  
Tilt No  
Swivel No

## Electrical System

Driven with Constant Current Driver  
Input Voltage/Hz 220V- 240V/50-60Hz  
Control Gear Included  
Mounting Remote  
LED Power Watts 4.4W  
System Power Watts 5.5W  
Operating Voltage Vin 220-240 Vac  
Power Factor p.f. > 0.95

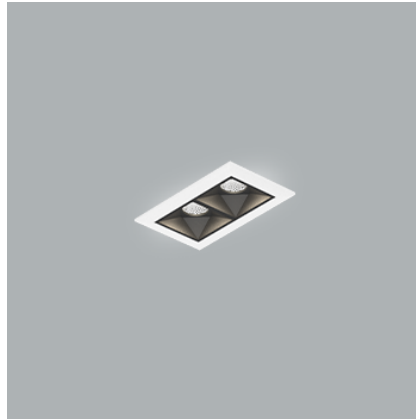

## Light Distribution

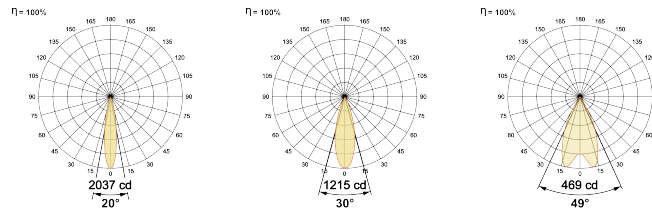

## LED Technology

Binning 3 Step MacAdam  
LED Life Time @ L70/B10 >50000 hours  
Colour Rendering (CRI) CRI90  
Led Type SMD high power  
LED Fitted -

## Controls

Standard Switchable On/Off  
Optional PDIM,DDIM,Non Dimmable

## Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	<b>Dark Knight 2</b>	<b>5W</b>	<b>WW27K</b>	<b>CRI90</b>	<b>20°(ss)</b>	<b>SWH</b>	<b>On/Off</b>

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
<b>Dark Knight 2</b>	<b>5W</b>	330	60	2700K	<b>CRI90</b>	20°(SS)	White	Non Dimmable
		341	62	3000K		30°(MD)	Black	Phase Dimmable
		369	67	4000K		49°(WD)	Custom	Dali Dimmable
		380	69	5700K				
<b>Dark Knight 2</b>	<b>5W</b>			<b>WW27K</b>	<b>CRI90</b>	<b>20°(SS)</b>	<b>SWH</b>	<b>On/Off</b>