

Look Around SF | 10W

Product Reference

Environment Indoor

Installation Ceiling Surface

Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Integral

LED Power Watts 8.8W


System Power Watts 10.1W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

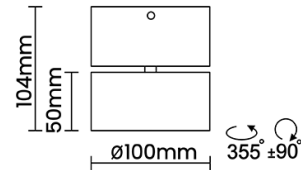

Light Distribution

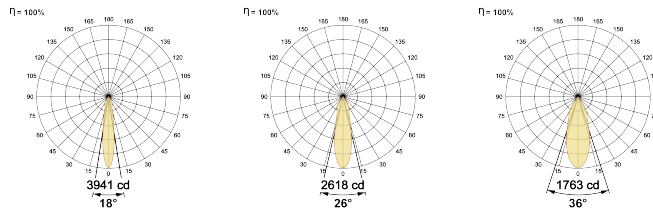

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/250mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,CASAMBI,Non Dimmable

Ordering Details

| Code Example: | Name | Watt | CCT | CRI | Angle | Finish | Control |
|---------------|-----------------------|------------|--------------|--------------|----------------|------------|---------------|
| | Look Around SF | 10W | WW27K | CRI80 | 18°(SS) | SWH | On/Off |

Select one from each column with highlighted values to create the ordering code

| NAME | WATT | LUMEN | EFFICACY | CCT | CRI | ANGLE | FINISH | CONTROL | |
|-----------------------|------------|-------|----------|--------------|--------------|----------------|------------------------|-------------------|----------------------------|
| Look Around SF | 10W | 970 | 96 | 2700K | WW27K | CRI80 | 18°(SS) 26°(MD) | White SWH | Non Dimmable On/Off |
| | | 1010 | 100 | 3000K | WW30K | CRI90 | 26°(MD) | Black SBL | Phase Dimmable PDIM |
| | | 1081 | 107 | 4000K | NW40K | | 36°(WD) | Custom CSM | Dali Dimmable DDIM |
| | | 1101 | 109 | 5700K | CW57K | | | | Casambi CBTM |
| Look Around SF | 10W | | | WW27K | CRI80 | 18°(SS) | SWH | On/Off | |