

Luke 35 2Way | 2X5W

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Mild Steel

Primary Lens -

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


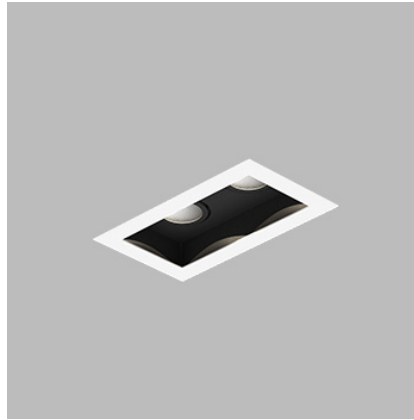
Mounting Remote

LED Power Watts 3.4W




System Power Watts 4.2W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95



Light Distribution

 $\eta = 100\%$

 $\eta = 100\%$

 $\eta = 100\%$


LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 9Vdc/350mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Luke 35 2Way	2X5W	WW27K	CRI80	16°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Luke 35 2Way	2X5W	2x365	87	2700K	WW27K	CRI80	16°(SS)	White SWH Non Dimmable On/Off
		2x391	93	3000K	WW30K	CRI90	22°(MD)	Black SBL Phase Dimmable PDIM
		2x416	99	4000K	NW40K		33°(WD)	Custom CSM Dali Dimmable DDIM
		2x424	101	5700K	CW57K			Casambi CBTM
Luke 35 2Way	2X5W			WW27K	CRI80	16°(SS)	SWH	On/Off