

Luke 75 | 22W

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Mild Steel

Primary Lens -

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included



Mounting Remote

LED Power Watts 18.7W


System Power Watts 21.5W

Operating Voltage V_{in} 220-240 Vac

Power Factor p.f. > 0.95

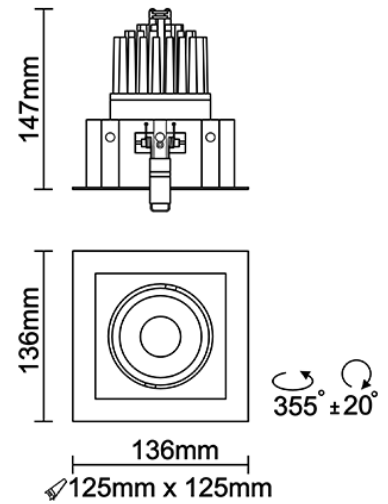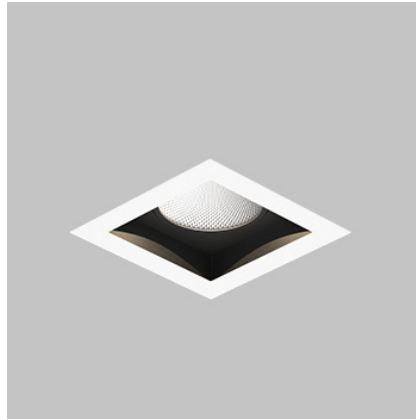

Light Distribution

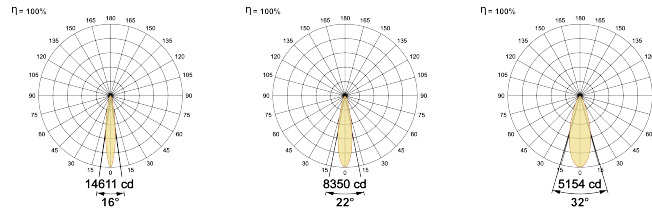

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/500mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

Ordering Details

| Code Example: | Name | Watt | CCT | CRI | Angle | Finish | Control |
|---------------|----------------|------------|--------------|--------------|----------------|------------|---------------|
| | Luke 75 | 22W | WW27K | CRI80 | 16°(SS) | SWH | On/Off |

Select one from each column with highlighted values to create the ordering code

| NAME | WATT | LUMEN | EFFICACY | CCT | CRI | ANGLE | FINISH | CONTROL | |
|----------------|------------|-------|----------|-------|--------------|--------------|---------|--------------------------------|---------------------|
| Luke 75 | 22W | 1935 | 90 | 2700K | WW27K | CRI80 | 16°(SS) | Non Dimmable On/Off | |
| | | 2064 | 96 | 3000K | WW30K | CRI90 | 22°(MD) | Phase Dimmable PDIM | |
| | | 2236 | 104 | 4000K | NW40K | | 32°(WD) | Dali Dimmable DDIM | |
| | | 2301 | 107 | 5700K | CW57K | | | Bluetooth Dimmable BTTM | |
| | | | | | 2700K-5700K | TW | | | Casambi CBTM |
| | | | | | Warm to Dim | W2D | | | |

| NAME | WATT | LUMEN | EFFICACY | CCT | CRI | ANGLE | FINISH | CONTROL |
|----------------|------------|-------|----------|--------------|--------------|----------------|------------|---------------|
| Luke 75 | 22W | | | WW27K | CRI80 | 16°(SS) | SWH | On/off |

Abby Lighting & Switchgear Limited 802 A, Fortune Terraces, New Link Road, Opp City Mall, Andheri West, Mumbai - 400053, India.

frontdesk@abbylighting.com, +91 9833645212

Abby reserves the right to discontinue any product from its collection at any time whatsoever and without prior notice

www.abbylighting.com