

# Luke 75 2Way | 2X22W

## Product Reference

Environment Indoor  
Installation Ceiling Recess

## Construction & Materials

Housing Mild Steel  
Primary Lens -  
Primary Reflector PC metallised  
Secondary Reflector -  
Body Finish White,Black,Custom  
Diffuser -  
Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium  
Cooling Technique Passive Cooling

## Optical System

Beam Direction Adjustable  
Tilt Yes  
Swivel Yes

## Electrical System


Driven with Constant Current Driver  
Input Voltage/Hz 220V- 240V/50-60Hz  
Control Gear Included  
Mounting Remote  
LED Power Watts 2x18.7W  
System Power Watts 2x21.5W  
Operating Voltage Vin 220-240 Vac  
Power Factor p.f. > 0.95

## Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Luke 75 2Way	2X22W	WW27K	CRI80	16°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Luke 75 2Way	2X22W	2x1935	90	2700K	WW27K	CRI80	16°(SS)	White SWH Non Dimmable On/Off
		2x2064	96	3000K	WW30K	CRI90	22°(MD)	Black SBL Phase Dimmable PDIM
		2x2236	104	4000K	NW40K		32°(WD)	Custom CSM Dali Dimmable DDIM
		2x2301	107	5700K	CW57K			Bluetooth Dimmable BTM
				2700K-5700K	TW			Casambi CBTM
				Warm to Dim	W2D			
Luke 75 2Way	2X22W			WW27K	CRI80	16°(SS)	SWH	On/Off

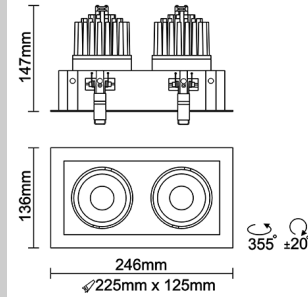

## Light Distribution

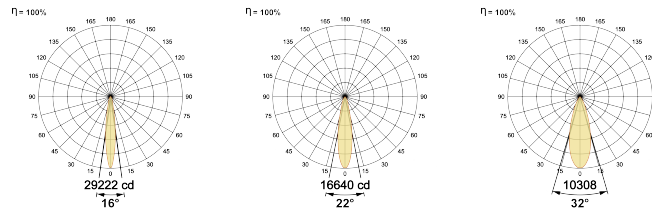

## LED Technology

Binning 3 Step MacAdam  
LED Life Time @ L70/B10 >50000 hours  
Colour Rendering (CRI) CRI80,CRI90  
Led Type COB  
LED Fitted CREE COB LED 36Vdc/500mA

## Controls

Standard Switchable On/Off  
Optional PDIM,DDIM,BTDM,CASAMBI,Non Dimmable