

Luke 75 2Way | 2X36W

Product Reference

Environment Indoor
Installation Ceiling Recess

Construction & Materials

Housing Mild Steel
Primary Lens -
Primary Reflector PC metallised
Secondary Reflector -
Body Finish White,Black,Custom
Diffuser -
Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium
Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable
Tilt Yes
Swivel Yes

Electrical System


Driven with Constant Current Driver
Input Voltage/Hz 220V- 240V/50-60Hz
Control Gear Included
Mounting Remote
LED Power Watts 2x31.5W
System Power Watts 2x36.2W
Operating Voltage Vin 220-240 Vac
Power Factor p.f. > 0.95

Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Luke 75 2Way	2X36W	WW27K	CRI80	16°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Luke 75 2Way	2X36W	2x2932	81	2700K	WW27K	CRI80	16°(SS)	White SWH Non Dimmable On/Off
		2x3113	86	3000K	WW30K	CRI90	22°(MD)	Black SBL Phase Dimmable PDIM
		2x3330	92	4000K	NW40K		32°(WD)	Custom CSM Dali Dimmable DDIM
		2x3439	95	5700K	CW57K			Bluetooth Dimmable BTM
				2700K-5700K	TW			Casambi CBTM
				Warm to Dim	W2D			
Luke 75 2Way	2X36W			WW27K	CRI80	16°(SS)	SWH	On/Off

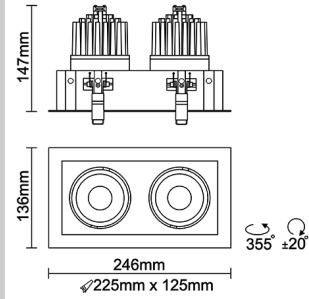

Light Distribution

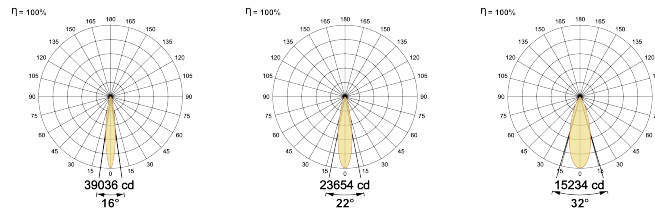

LED Technology

Binning 3 Step MacAdam
LED Life Time @ L70/B10 >50000 hours
Colour Rendering (CRI) CRI80,CRI90
Led Type COB
LED Fitted CREE COB LED 36Vdc/900mA

Controls

Standard Switchable On/Off
Optional PDIM,DDIM,BTDM,CASAMBI,Non Dimmable