

Ovo Carbon P 75 | 10W

Product Reference

Environment Indoor
Installation Ceiling Suspended

Construction & Materials

Housing Aluminium
Primary Lens PMMA
Primary Reflector PC metallised
Secondary Reflector -
Body Finish White,Black,Custom
Diffuser -
Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium
Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed
Tilt No
Swivel No

Electrical System


Driven with Constant Current Driver
Input Voltage/Hz 220V- 240V/50-60Hz
Control Gear Included
Mounting Integral
LED Power Watts 8.8W
System Power Watts 10.1W
Operating Voltage Vin 220-240 Vac
Power Factor p.f. > 0.95

Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Ovo Carbon P 75	10W	WW27K	CRI80	22°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Ovo Carbon P 75	10W	879	87	2700K	WW27K	CRI80	22°(SS)	White SWH Non Dimmable On/Off
		909	90	3000K	WW30K	CRI90	29°(MD)	Black SBL Phase Dimmable PDIM
		960	95	4000K	NW40K		51°(WD)	Custom CSM Dali Dimmable DDIM
		980	97	5700K	CW57K			Bluetooth Dimmable BTTM
						2700K-5700K	TW	
				Warm to Dim	W2D			
Ovo Carbon P 75	10W			WW27K	CRI80	22°(SS)	SWH	On/Off

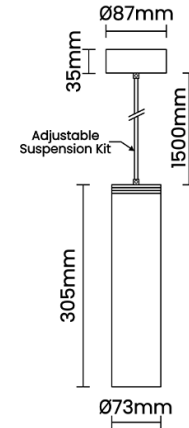

Light Distribution

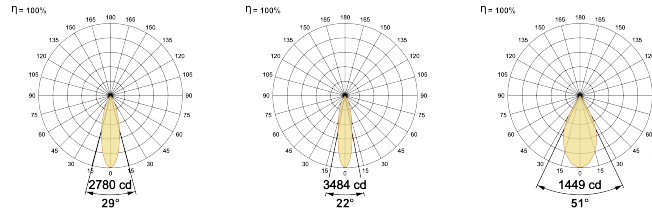

LED Technology

Binning 3 Step MacAdam
LED Life Time @ L70/B10 >50000 hours
Colour Rendering (CRI) CRI80,CRI90
Led Type COB
LED Fitted CREE COB LED 36Vdc/350mA

Controls

Standard Switchable On/Off
Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

