

# Peeping Tom | 8W

## Product Reference

Environment Indoor

Installation Ceiling Recess

## Construction & Materials

Housing Die Cast Aluminium, Milled Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector -

Body Finish White, Black, Custom

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 7.4W


System Power Watts 8.5W

Operating Voltage  $V_{in}$  220-240 Vac

Power Factor p.f. > 0.95



## Light Distribution

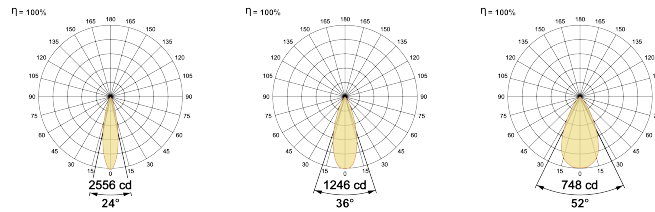

## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80, CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/180mA

## Controls

Standard Switchable On/Off

Optional PDIM, DDIM, BTM, CASAMBI, Non Dimmable

## Ordering Details

| Code Example: | Name        | Watt | CCT   | CRI   | Angle   | Finish | Control |
|---------------|-------------|------|-------|-------|---------|--------|---------|
|               | Peeping Tom | 8W   | WW27K | CRI80 | 24°(MD) | SWH    | On/Off  |

Select one from each column with highlighted values to create the ordering code

| NAME        | WATT | LUMEN | EFFICACY    | CCT         | CRI   | ANGLE   | FINISH   | CONTROL    |                        |
|-------------|------|-------|-------------|-------------|-------|---------|----------|------------|------------------------|
| Peeping Tom | 8W   | 621   | 73          | 2700K       | WW27K | CRI80   | 24°(MD)  | White SWH  | Non Dimmable On/Off    |
|             |      | 638   | 75          | 3000K       | WW30K | CRI90   | 36°(WD)  | Black SBL  | Phase Dimmable PDIM    |
|             |      | 672   | 79          | 4000K       | NW40K |         | 52°(VWD) | Custom CSM | Dali Dimmable DDIM     |
|             |      | 689   | 81          | 5700K       | CW57K |         |          |            | Bluetooth Dimmable BTM |
|             |      |       |             | 2700K-5700K | TW    |         |          |            | Casambi CBTM           |
|             |      |       | Warm to Dim | W2D         |       |         |          |            |                        |
| Peeping Tom | 8W   |       |             | WW27K       | CRI80 | 24°(MD) | SWH      | On/Off     |                        |