

Snap Soft 12 | 10W

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Die Cast Aluminium

Primary Lens -

Primary Reflector -

Secondary Reflector -

Body Finish White,Black

Diffuser Microprismatic

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included



Mounting Remote

LED Power Watts 8.8W


System Power Watts 10.1W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

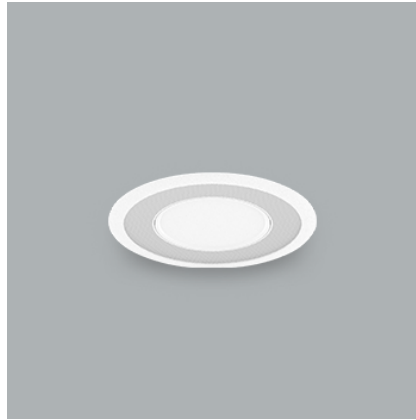

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD high power

LED Fitted Cree 3030 LED 33V-36Vdc/250mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Snap Soft 12	10W	WW27K	CRI80	74°	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL			
Snap Soft 12	10W	747	74	2700K	WW27K	CRI80	74°	White	SWH	Non Dimmable	On/Off
		768	76	3000K	WW30K	CRI90		Black	SBL	Phase Dimmable	PDIM
		808	80	4000K	NW40K				Dali Dimmable	DDIM	
		828	82	5700K	CW57K				Bluetooth Dimmable	BTTM	
				2700K-5700K	TW				Casambi	CBTM	
Snap Soft 12	10W			WW27K	CRI80	74°	SWH			On/Off	