

Spa 35 | 8W

Product Reference

Environment Indoor
Installation Ceiling Recess

Construction & Materials

Housing Aluminium
Primary Lens PMMA
Primary Reflector PC metallised
Secondary Reflector -
Body Finish White,Black,Custom
Diffuser -
Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium
Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed
Tilt No
Swivel No

Electrical System


Driven with Constant Current Driver
Input Voltage/Hz 220V- 240V/50-60Hz
Control Gear Included
Mounting Remote
LED Power Watts 7.7W
System Power Watts 8.8W
Operating Voltage Vin 220-240 Vac
Power Factor p.f. > 0.95

Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Spa 35	8W	WW27K	CRI80	16°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
Spa 35	8W	563	64	2700K	WW27K	CRI80	16°(SS)	White	SWH	Non Dimmable	On/Off
		598	68	3000K	WW30K	CRI90	22°(MD)	Black	SBL	Phase Dimmable	PDIM
		634	72	4000K	NW40K		32°(WD)	Custom	CSM	Dali Dimmable	DDIM
		651	74	5700K	CW57K					Bluetooth Dimmable	BTTM
				2700K-5700K	TW					Casambi	CBTM
				2700K-5700K	TW						
				Warm to Dim	W2D						
Spa 35	8W			WW27K		CRI80	16°(SS)	SWH		On/Off	



Light Distribution

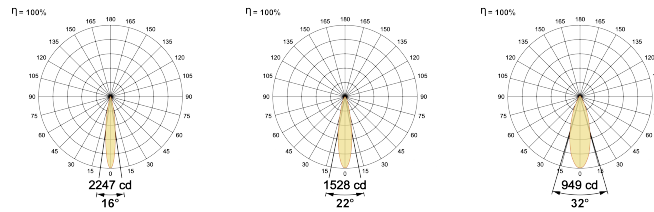

LED Technology

Binning 3 Step MacAdam
LED Life Time @ L70/B10 >50000 hours
Colour Rendering (CRI) CRI80,CRI90
Led Type COB
LED Fitted CREE COB LED 36Vdc/180mA

Controls

Standard Switchable On/Off
Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable