

Xcent Pro | 10W

Product Reference

Environment Indoor
 Installation Ceiling Recess

Construction & Materials

Housing Aluminium
 Primary Lens PMMA
 Primary Reflector -
 Secondary Reflector Anodised
 Body Finish White,Black,Custom
 Diffuser -
 Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium
 Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable
 Tilt Yes
 Swivel No

Electrical System


Driven with Constant Current Driver
 Input Voltage/Hz 220V- 240V/50-60Hz
 Control Gear Included
 Mounting Remote
 LED Power Watts 8.8W
 System Power Watts 10.1W
 Operating Voltage Vin 220-240 Vac
 Power Factor p.f. > 0.95

Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Xcent Pro	10W	WW27K	CRI80	20°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL	
Xcent Pro	10W	859	85	2700K	WW27K	CRI80	20°(SS)	White SWH	Non Dimmable On/Off
		889	88	3000K	WW30K	CRI90	30°(MD)	Black SBL	Phase Dimmable PDIM
		929	92	4000K	NW40K		35°(WD)	Custom CSM	Dali Dimmable DDIM
		949	94	5700K	CW57K		46°(VWD)		Bluetooth Dimmable BTTM
				2700K-5700K	TW				Casambi CBTM
				Warm to Dim	W2D				
Xcent Pro	10W			WW27K	CRI80	20°(SS)	SWH	On/Off	



Light Distribution

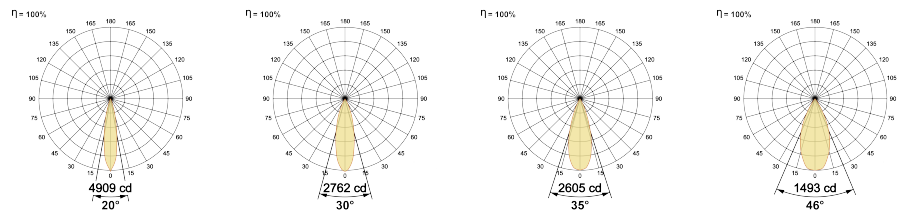

LED Technology

Binning 3 Step MacAdam
 LED Life Time @ L80/B10 >50000 hours
 Colour Rendering (CRI) CRI80,CRI90
 Led Type COB
 LED Fitted Cree COB LED 36Vdc/250mA

Controls

Standard Switchable On/Off
 Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable