

Spotboy SR 50 2Way | 2X10W

Product Reference

Environment Indoor

Installation Semi Recess

Construction & Materials

Housing Die Cast Aluminium, Milled Aluminium

Primary Lens PMMA

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White, Black, Custom

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 2x9.1W


System Power Watts 2x10.5W

Operating Voltage V_{in} 220-240 Vac

Power Factor p.f. > 0.95



Light Distribution

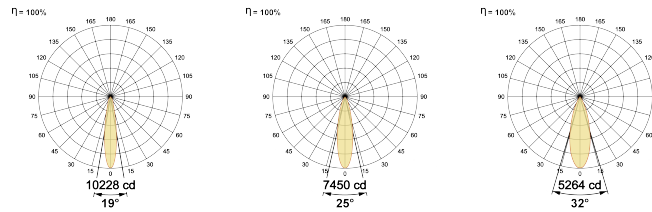

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80, CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/250mA

Controls

Standard Switchable On/Off

Optional PDIM, DDIM, BTM, CASAMBI, Non Dimmable

Ordering Details

| Code Example: | Name | Watt | CCT | CRI | Angle | Finish | Control |
|---------------|---------------------------|--------------|--------------|--------------|----------------|------------|---------------|
| | Spotboy SR 50 2Way | 2X10W | WW27K | CRI80 | 19°(SS) | SWH | On/Off |

Select one from each column with highlighted values to create the ordering code

| NAME | WATT | LUMEN | EFFICACY | CCT | CRI | ANGLE | FINISH | CONTROL |
|---------------------------|--------------|--------|----------|--------------|--------------|----------------|------------|---|
| Spotboy SR 50 2Way | 2X10W | 2x977 | 93 | 2700K | WW27K | CRI80 | 19°(SS) | White SWH Non Dimmable On/Off |
| | | 2x1061 | 101 | 3000K | WW30K | CRI90 | 25°(MD) | Black SBL Phase Dimmable PDIM |
| | | 2x1124 | 107 | 4000K | NW40K | | 32°(WD) | Custom CSM Dali Dimmable DDIM |
| | | 2x1155 | 110 | 5700K | CW57K | | | Bluetooth Dimmable BTTM |
| | | | | 2700K-5700K | TW | | | Casambi CBTM |
| | | | | Warm to Dim | W2D | | | |
| Spotboy SR 50 2Way | 2X10W | | | WW27K | CRI80 | 19°(SS) | SWH | On/Off |

