

# Spotboy SR 50 2Way | 2X15W

## Product Reference

Environment Indoor

Installation Semi Recess

## Construction & Materials

Housing Die Cast Aluminium, Milled Aluminium

Primary Lens PMMA

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White, Black, Custom

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 2x12.6W


System Power Watts 2x14.5W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

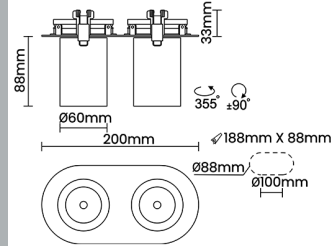

## Light Distribution

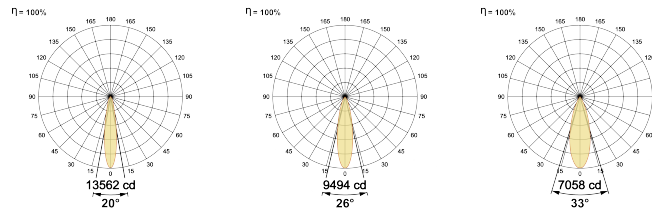

## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80, CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/350mA

## Controls

Standard Switchable On/Off

Optional PDIM, DDIM, BTM, CASAMBI, Non Dimmable

## Ordering Details

| Code Example: | Name                      | Watt         | CCT          | CRI          | Angle          | Finish     | Control       |
|---------------|---------------------------|--------------|--------------|--------------|----------------|------------|---------------|
|               | <b>Spotboy SR 50 2Way</b> | <b>2X15W</b> | <b>WW27K</b> | <b>CRI80</b> | <b>20°(SS)</b> | <b>SWH</b> | <b>On/Off</b> |

Select one from each column with highlighted values to create the ordering code

| NAME                      | WATT         | LUMEN  | EFFICACY | CCT          | CRI          | ANGLE          | FINISH     | CONTROL                                     |
|---------------------------|--------------|--------|----------|--------------|--------------|----------------|------------|---|
| <b>Spotboy SR 50 2Way</b> | <b>2X15W</b> | 2x1349 | 93       | 2700K        | <b>WW27K</b> | <b>CRI80</b>   | 20°(SS)    | White <b>SWH</b> Non Dimmable <b>On/Off</b> |
|                           |              | 2x1392 | 96       | 3000K        | <b>WW30K</b> | CRI90          | 26°(MD)    | Black <b>SBL</b> Phase Dimmable <b>PDIM</b> |
|                           |              | 2x1494 | 103      | 4000K        | <b>NW40K</b> |                | 33°(WD)    | Custom <b>CSM</b> Dali Dimmable <b>DDIM</b> |
|                           |              | 2x1537 | 106      | 5700K        | <b>CW57K</b> |                |            | Bluetooth Dimmable <b>BTM</b>               |
|                           |              |        |          | 2700K-5700K  | <b>TW</b>    |                |            |   |
|                           |              |        |          | Warm to Dim  | <b>W2D</b>   |                |            |   |
| <b>Spotboy SR 50 2Way</b> | <b>2X15W</b> |        |          | <b>WW27K</b> | <b>CRI80</b> | <b>20°(SS)</b> | <b>SWH</b> | <b>On/Off</b>                               |

