
ABBY LIGHTING

220V 240V 50/60Hz | CRI 80 | IP20 | L80B10 >50,000h | MacAdam Step 3 | Swivel | Tilt

Optional: Bluetooth | Dimmable | Tunable White | Warm to Dim | CRI 90

# Spotboy SR 75 | 30W



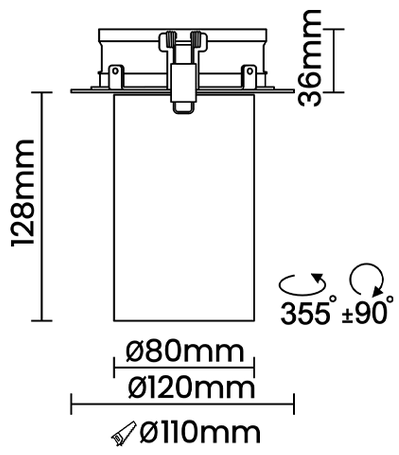


### Product Reference

Environment Indoor

Installation Semi Recess

### Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

### Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

### Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

### Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Remote


LED Power Watts 25.6W

System Power Watts 29.4W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

### Light Distribution

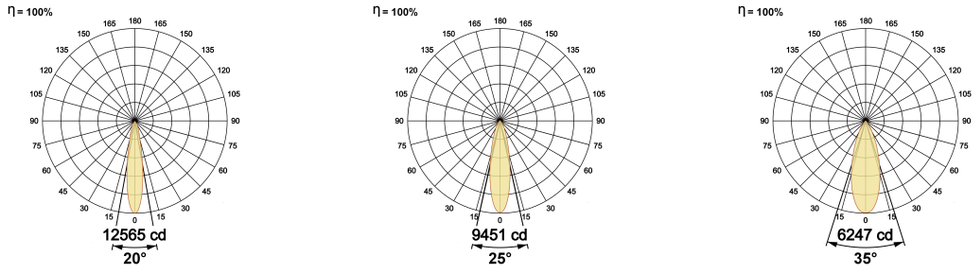


### LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/700mA

### Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

### Ordering Details

| Code Example: | Name | Watt | CCT | CRI | Angle | Finish | Control |
|---|---|---|---|---|---|---|---|
| | **Spotboy SR 75** | **30W** | **WW27K** | **CRI80** | **20°(SS)** | **SWH** | **On/Off** |

Select one from each column with highlighted values to create the ordering code

| NAME | WATT | LUMEN | EFFICACY | CCT | | CRI | ANGLE | FINISH | | CONTROL | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| **Spotboy SR 75** | **30W** | 2617 | 89 | 2700K | **WW27K** | **CRI80** | 20°(SS) | White | **SWH** | Non Dimmable | **On/Off** |
| | | 2793 | 95 | 3000K | **WW30K** | CRI90 | 25°(MD) | Black | **SBL** | Phase Dimmable | **PDIM** |
| | | 2999 | 102 | 4000K | **NW40K** | | 35°(WD) | Custom | **CSM** | Dali Dimmable | **DDIM** |
| | | 3146 | 107 | 5700K | **CW57K** | | | | | Bluetooth Dimmable | **BTTM** |
| | | | | 2700K-5700K | **TW** | | | | | Casambi | **CBTM** |
| | | | | Warm to Dim | **W2D** | | | | | | |
| **Spotboy SR 75** | **30W** | | | **WW27K** | | **CRI80** | **20°(SS)** | **SWH** | | **On/Off** | |

**Abby Lighting & Switchgear Limited** 802 A, Fortune Terraces, New Link Road, Opp City Mall, Andheri West, Mumbai - 400053, India. frontdesk@abbylighting.com, +91 7304623220