

# Romeo Pin Spot | 15W

## Product Reference

Environment Indoor

Installation Ceiling Recess

## Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Fixed

Tilt No

Swivel No

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included



Mounting Remote

LED Power Watts 12.6W


System Power Watts 14.5W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

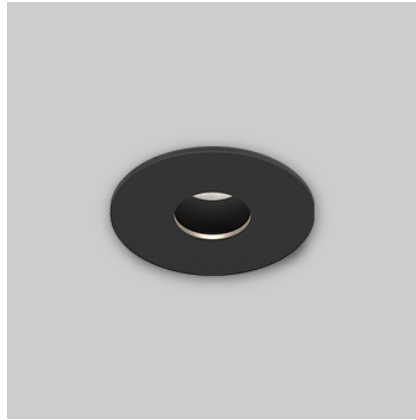

## Light Distribution

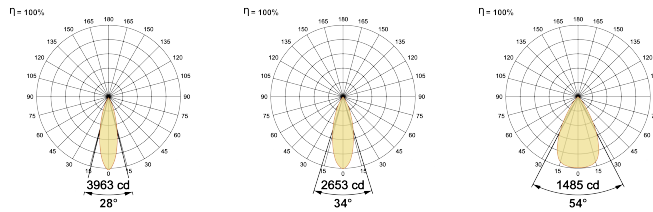

## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/350mA

## Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

## Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	<b>Romeo Pin Spot</b>	<b>15W</b>	<b>WW27K</b>	<b>CRI80</b>	<b>28°(MD)</b>	<b>SWH</b>	<b>On/Off</b>

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Romeo Pin Spot	15W	1233	85	2700K	WW27K	CRI80	28°(MD)	White SWH Non Dimmable On/Off
		1276	88	3000K	WW30K	CRI90	34°(WD)	Black SBL Phase Dimmable PDIM
		1334	92	4000K	NW40K		56°(VWD)	Custom CSM Dali Dimmable DDIM
		1363	94	5700K	CW57K			Bluetooth Dimmable BTTM
				2700K-5700K	TW			Casambi CBTM
				Warm to Dim	W2D			
Romeo Pin Spot	15W			WW27K	CRI80	28°(MD)	SWH	On/Off