

Romeo Mini Oval Spot | 5W

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included



Mounting Remote

LED Power Watts 3.4W


System Power Watts 4.2W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

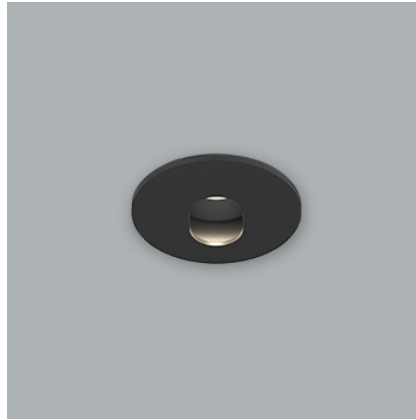

Light Distribution

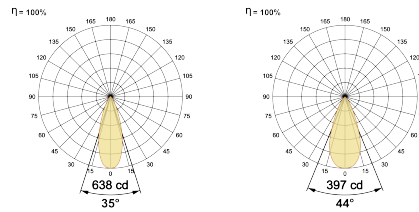

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/130mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Romeo Mini Oval Spot	5W	WW27K	CRI80	35°(MD)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
Romeo Mini Oval Spot	5W	252	60	2700K	WW27K	CRI80	35°(MD)	White	SWH	Non Dimmable	On/Off
		260	62	3000K	WW30K	CRI90	44°(WD)	Black	SBL	Phase Dimmable	PDIM
		273	65	4000K	NW40K			Custom	CSM	Dali Dimmable	DDIM
		281	67	5700K	CW57K					Bluetooth Dimmable	BTTM
				Warm to Dim		W2D				Casambi	CBTM
Romeo Mini Oval Spot	5W			WW27K		CRI80	35°(MD)	SWH		On/Off	

Abby reserves the right to discontinue any product from its collection at any time whatsoever and without prior notice

frontdesk@abbylighting.com, +91 9833645212

www.abbylighting.com