

# Xo 35 | 5W

## Product Reference

Environment Indoor

Installation Ceiling Recess

## Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Remote

LED Power Watts 3.4W

System Power Watts 4.2W

Operating Voltage  $V_{in}$  220-240 Vac


Power Factor p.f. > 0.5

## Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
Xo 35	5W	WW27K	CRI80	16°(SS)	SWH	On/Off	

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL	
Xo 35	5W	365	87	2700K	WW27K	CRI80	16°(SS)	White SWH	Non Dimmable On/Off
		391	93	3000K	WW30K	CRI90	22°(MD)	Black SBL	Phase Dimmable PDIM
		416	99	4000K	NW40K		33°(WD)	Custom CSM	Dali Dimmable DDIM
		424	101	5700K	CW57K				Casambi CBTM
Xo 35	5W			WW27K	CRI80	16°(SS)	SWH	On/Off	

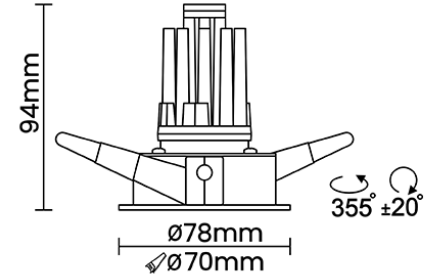

## Light Distribution

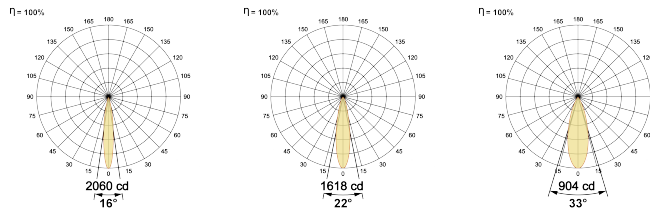

## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/130mA

## Controls

Standard Switchable On/Off

Optional PDIM,DDIM,CASAMBI,Non Dimmable