

Xo 35 | 8W

Product Reference

Environment Indoor
Installation Ceiling Recess

Construction & Materials

Housing Die Cast Aluminium
Primary Lens PMMA
Primary Reflector PC metallised
Secondary Reflector -
Body Finish White,Black,Custom
Diffuser -
Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium
Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable
Tilt Yes
Swivel Yes

Electrical System


Driven with Constant Current Driver
Input Voltage/Hz 220V- 240V/50-60Hz
Control Gear Included
Mounting Remote
LED Power Watts 6.6W
System Power Watts 8.3W
Operating Voltage Vin 220-240 Vac
Power Factor p.f. > 0.95

Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
Xo 35	8W	WW27K	CRI80	16°(SS)	SWH	On/Off	

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL	
Xo 35	8W	581	70	2700K	WW27K	CRI80	16°(SS)	White SWH	Non Dimmable On/Off
		614	74	3000K	WW30K	CRI90	22°(MD)	Black SBL	Phase Dimmable PDIM
		647	78	4000K	NW40K		33°(WD)	Custom CSM	Dali Dimmable DDIM
		672	81	5700K	CW57K				Bluetooth Dimmable BTM
				2700K-5700K	TW				Casambi CBTM
Xo 35	8W			WW27K	CRI80	16°(SS)	SWH	On/Off	

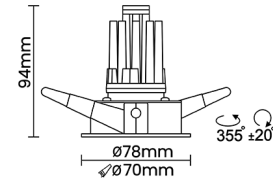

Light Distribution

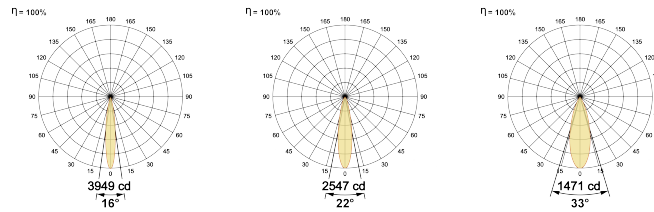

LED Technology

Binning 3 Step MacAdam
LED Life Time @ L70/B10 >50000 hours
Colour Rendering (CRI) CRI80,CRI90
Led Type COB
LED Fitted CREE COB LED 9Vdc/700mA

Controls

Standard Switchable On/Off
Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable