

Tiny AR | 5W

Product Reference

Environment Indoor
Installation Ceiling Recess

Construction & Materials

Housing Aluminium
Primary Lens Polycarbonate
Primary Reflector PC metallised
Secondary Reflector Anodised
Body Finish White,Black,Custom
Diffuser -
Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium
Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed
Tilt Yes
Swivel No

Electrical System



Driven with Constant Current Driver
Input Voltage/Hz 220V- 240V/50-60Hz
Control Gear Included
Mounting Remote
LED Power Watts 3.4W
System Power Watts 4.3W
Operating Voltage Vin 220-240 Vac
Power Factor p.f. > 0.5

Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Tiny AR	5W	WW27K	CRI80	36°(MD)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL	
Tiny AR	5W	378	88	2700K	WW27K	CRI80	36°(MD)	White SWH	Non Dimmable On/Off
		391	91	3000K	WW30K	CRI90	56°(WD)	Black SBL	Phase Dimmable PDIM
		413	96	4000K	NW40K			Custom CSM	Dali Dimmable DDIM
		421	98	5700K	CW57K				Casambi CBTM
					Warm to Dim W2D				
Tiny AR	5W			WW27K	CRI80	36°(MD)	SWH	On/Off	

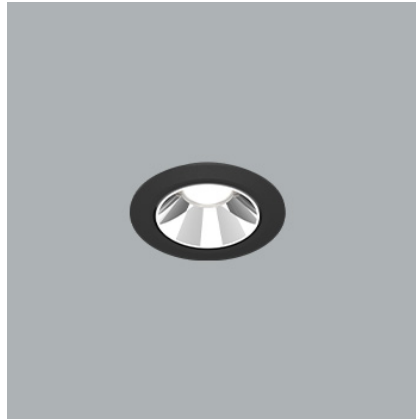

Light Distribution

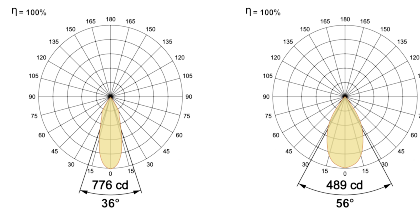

LED Technology

Binning 3 Step MacAdam
LED Life Time @ L70/B10 >50000 hours
Colour Rendering (CRI) CRI80,CRI90
Led Type COB
LED Fitted CREE COB LED 9Vdc/350mA

Controls

Standard Switchable On/Off
Optional PDIM,DDIM,CASAMBI,Non Dimmable