

# Tiny AR | 5W

## Product Reference

Environment Indoor

Installation Ceiling Recess

## Construction & Materials

Housing Aluminium

Primary Lens Polycarbonate

Primary Reflector PC metallised

Secondary Reflector Anodised

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Fixed

Tilt Yes

Swivel No

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included



Mounting Remote

LED Power Watts 3.4W


System Power Watts 4.3W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.5

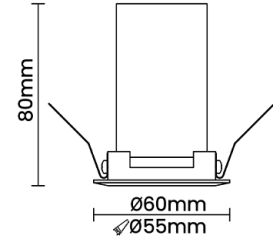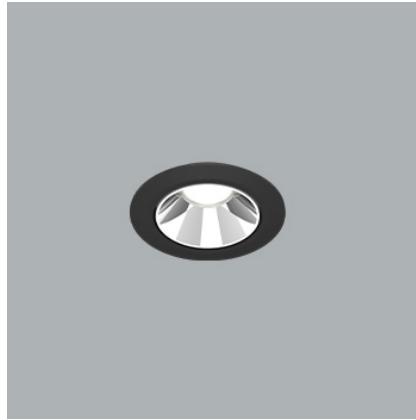

## Light Distribution

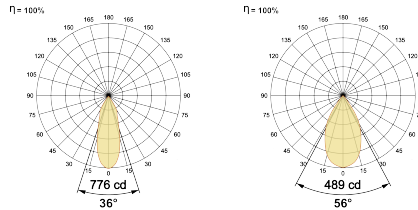

## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/130mA

## Controls

Standard Switchable On/Off

Optional PDIM,DDIM,CASAMBI,Non Dimmable

## Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Tiny AR	5W	WW27K	CRI80	36°(MD)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Tiny AR	5W	378	88	2700K	WW27K	CRI80	36°(MD)	White SWH Non Dimmable On/Off
		391	91	3000K	WW30K	CRI90	56°(WD)	Black SBL Phase Dimmable PDIM
		413	96	4000K	NW40K			Custom CSM Dali Dimmable DDIM
		421	98	5700K	CW57K			Casambi CBTM
					Warm to Dim W2D			
Tiny AR	5W			WW27K	CRI80	36°(MD)	SWH	On/Off