

ABBY LIGHTING

220V 240V 50/60Hz | CRI 80 | IP20 | L80B10 >50,000h | MacAdam Step 3

Optional: Dimmable | CRI 90

Tiny Wash | 5W

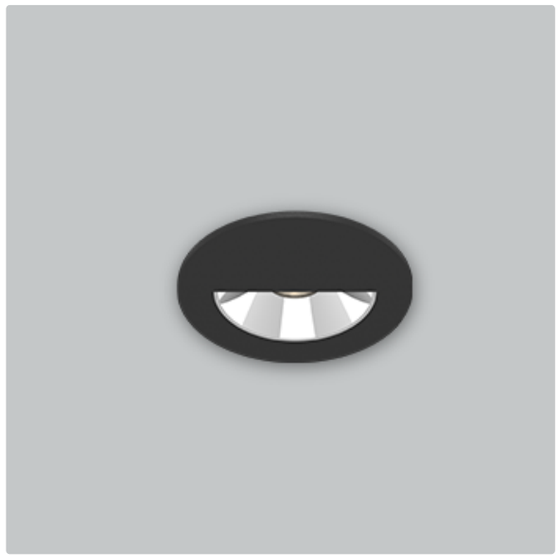

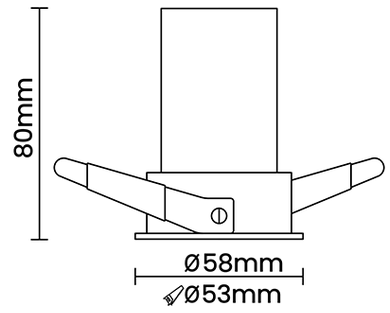

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Aluminium

Primary Lens Polycarbonate

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed Asymmetric

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Remote


LED Power Watts 3.4W

System Power Watts 4.2W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/130mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Tiny Wash	**5W**	**WW27K**	**CRI80**		**SWH**	**On/Off**

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
Tiny Wash	**5W**	218	52	2700K	**WW27K**	**CRI80**		White	**SWH**	Non Dimmable	**On/Off**
		231	55	3000K	**WW30K**	CRI90		Black	**SBL**	Phase Dimmable	**PDIM**
		244	58	4000K	**NW40K**			Custom	**CSM**	Dali Dimmable	**DDIM**
		252	60	5700K	**CW57K**					Casambi	**CBTM**
Tiny Wash	**5W**			**WW27K**		**CRI80**		**SWH**		**On/Off**	