

## Go Pro 35 PF | 12W

### Product Reference

Environment Indoor

Installation Ceiling Recess

### Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector Anodised

Body Finish White,Black

Diffuser -

Antiglare Baffle -

### Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

### Optical System

Beam Direction Fixed

Tilt No

Swivel No

### Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 10.5W


System Power Watts 12.1W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95



### Light Distribution

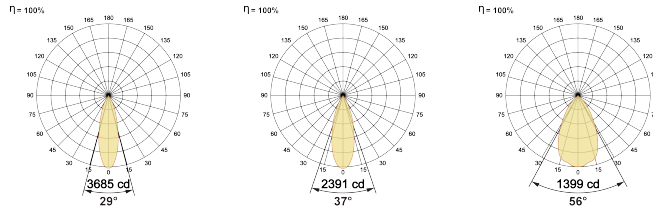

### LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/300mA

### Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

### Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Go Pro 35 PF	12W	WW27K	CRI80	29°(MD)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL		
Go Pro 35 PF	12W	1246	103	2700K	WW27K	CRI80	29°(MD)	White SWH	Non Dimmable	On/Off
		1283	106	3000K	WW30K	CRI90	37°(WD)	Black SBL	Phase Dimmable	PDIM
		1343	111	4000K	NW40K	56°(VWD)	Dali Dimmable		DDIM	
		1367	113	5700K	CW57K		Bluetooth Dimmable		BTTM	
					2700K-5700K	TW		Casambi	CBTM	
				Warm to Dim	W2D					
Go Pro 35 PF	12W			WW27K	CRI80	29°(MD)	SWH	On/Off		