

# Go Pro 50 PF | 20W

## Product Reference

Environment Indoor  
Installation Ceiling Recess

## Construction & Materials

Housing Die Cast Aluminium  
Primary Lens PMMA  
Primary Reflector -  
Secondary Reflector Anodised  
Body Finish White,Black  
Diffuser -  
Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium  
Cooling Technique Passive Cooling

## Optical System

Beam Direction Fixed  
Tilt No  
Swivel No

## Electrical System



Driven with Constant Current Driver  
Input Voltage/Hz 220V- 240V/50-60Hz  
Control Gear Included  
Mounting Remote  
LED Power Watts 17.4W  
System Power Watts 20.0W  
Operating Voltage  $V_{in}$  220-240 Vac  
Power Factor p.f. > 0.95

## Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Go Pro 50 PF	20W	WW27K	CRI80	24°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Go Pro 50 PF	20W	1880	94	2700K	WW27K	24°(SS)	White	Non Dimmable
		1940	97	3000K	WW30K	32°(MD)	Black	Phase Dimmable
		2040	102	4000K	NW40K	36°(WD)		Dali Dimmable
		2080	104	5700K	CW57K	46°(VWD)		Bluetooth Dimmable
				2700K-5700K	TW			Casambi
					Warm to Dim	W2D		
Go Pro 50 PF	20W			WW27K	CRI80	24°(SS)	SWH	On/Off

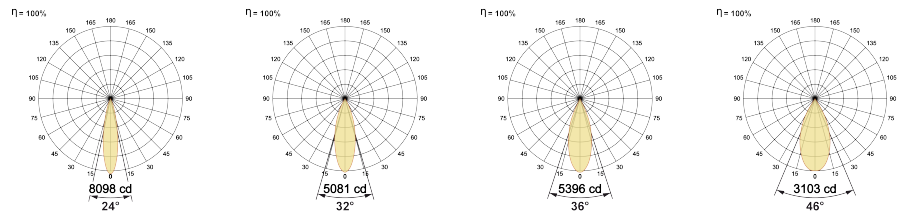

## LED Technology

Binning 3 Step MacAdam  
LED Life Time @ L70/B10 >50000 hours  
Colour Rendering (CRI) CRI80,CRI90  
Led Type COB  
LED Fitted CREE COB LED 36Vdc/500mA

## Controls

Standard Switchable On/Off  
Optional PDIM,DDIM,BTDM,CASAMBI,Non Dimmable