

# Go Pro 35 AR | 9W

## Product Reference

Environment Indoor

Installation Ceiling Recess

## Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector Anodised

Body Finish White,Black

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 7.5W


System Power Watts 8.6W

Operating Voltage  $V_{in}$  220-240 Vac

Power Factor p.f. > 0.95

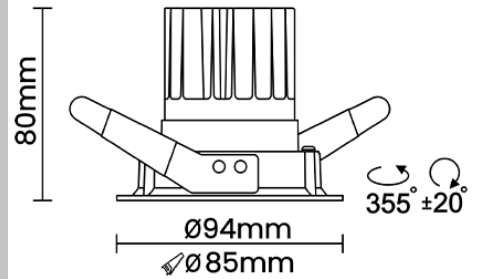

## Light Distribution

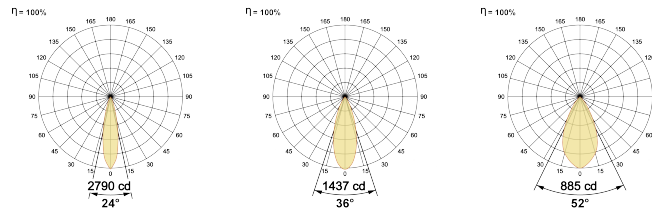

## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/200mA

## Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

## Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Go Pro 35 AR	9W	WW27K	CRI80	24°(MD)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL	
Go Pro 35 AR	9W	697	81	2700K	WW27K	CRI80	24°(MD)	White SWH	Non Dimmable On/Off
		722	84	3000K	WW30K	CRI90	36°(WD)	Black SBL	Phase Dimmable PDIM
		757	88	4000K	NW40K		52°(VWD)		Dali Dimmable DDIM
		783	91	5700K	CW57K				Bluetooth Dimmable BTTM
						2700K-5700K TW			
				Warm to Dim W2D					
Go Pro 35 AR	9W			WW27K	CRI80	24°(MD)	SWH	On/Off	