

Go Pro 50 AR | 15W

Product Reference

Environment Indoor
Installation Ceiling Recess

Construction & Materials

Housing Die Cast Aluminium
Primary Lens PMMA
Primary Reflector -
Secondary Reflector Anodised
Body Finish White,Black
Diffuser -
Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium
Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable
Tilt Yes
Swivel Yes

Electrical System


Driven with Constant Current Driver
Input Voltage/Hz 220V- 240V/50-60Hz
Control Gear Included
Mounting Remote
LED Power Watts 12.4W
System Power Watts 14.2W
Operating Voltage Vin 220-240 Vac
Power Factor p.f. > 0.95

Ordering Details


| Code Example: | Name | Watt | CCT | CRI | Angle | Finish | Control |
|---------------|---------------------|------------|--------------|--------------|----------------|------------|---------------|
| | Go Pro 50 AR | 15W | WW27K | CRI80 | 20°(SS) | SWH | On/Off |

Select one from each column with highlighted values to create the ordering code

| NAME | WATT | LUMEN | EFFICACY | CCT | CRI | ANGLE | FINISH | CONTROL | |
|---------------------|------------|-------|----------|--------------|--------------|----------------|------------|----------------|--------------------|
| Go Pro 50 AR | 15W | 1392 | 98 | 2700K | WW27K | CRI80 | White | Non Dimmable | |
| | | 1434 | 101 | 3000K | WW30K | CRI90 | SWH | Phase Dimmable | |
| | | 1505 | 106 | 4000K | NW40K | | SBL | Dali Dimmable | |
| | | 1534 | 108 | 5700K | CW57K | | | Dali Dimmable | |
| | | | | | 2700K-5700K | TW | | | Bluetooth Dimmable |
| | | | | | Warm to Dim | W2D | | | Casambi |
| Go Pro 50 AR | 15W | | | WW27K | CRI80 | 20°(SS) | SWH | On/Off | |



Light Distribution

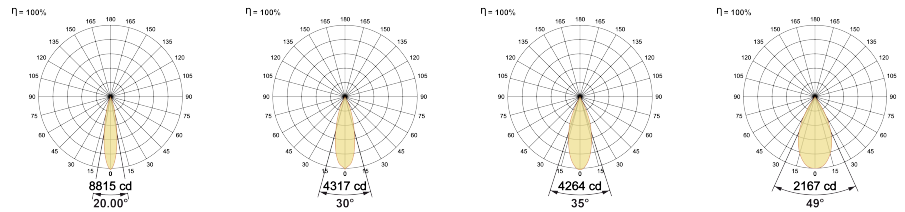

LED Technology

Binning 3 Step MacAdam
LED Life Time @ L70/B10 >50000 hours
Colour Rendering (CRI) CRI80,CRI90
Led Type COB
LED Fitted CREE COB LED 36Vdc/350mA

Controls

Standard Switchable On/Off
Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable