

## Go Pro 35 M | 5W

### Product Reference

Environment Indoor

Installation Ceiling Recess

### Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector Anodised

Body Finish White,Black

Diffuser -

Antiglare Baffle -

### Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

### Optical System

Beam Direction Adjustable

Tilt Yes

Swivel No

### Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 3.4W


System Power Watts 4.2W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.5



### Light Distribution

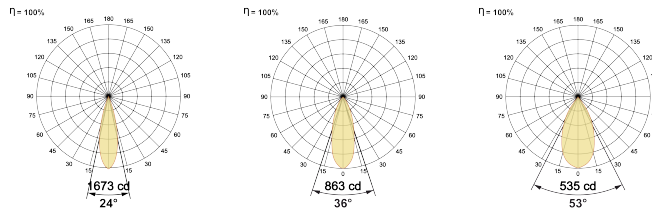

### LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/130mA

### Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

### Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Go Pro 35 M	5W	WW27K	CRI80	24°(MD)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
Go Pro 35 M	5W	420	100	2700K	WW27K	CRI80	24°(MD)	White	SWH	Non Dimmable	On/Off
		433	103	3000K	WW30K	CRI90	36°(WD)	Black	SBL	Phase Dimmable	PDIM
		454	108	4000K	NW40K		52°(VWD)			Dali Dimmable	DDIM
		466	111	5700K	CW57K					Casambi	CBTM
				Warm to Dim		W2D					
Go Pro 35 M	5W			WW27K		CRI80	24°(MD)	SWH		On/Off	