

Go Pro 35 M | 12W

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector Anodised

Body Finish White,Black

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 10.5W


System Power Watts 12.1W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

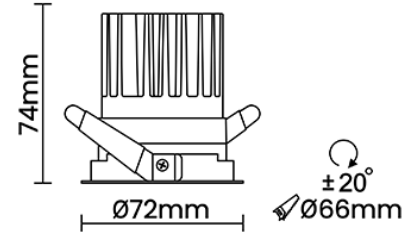

Light Distribution

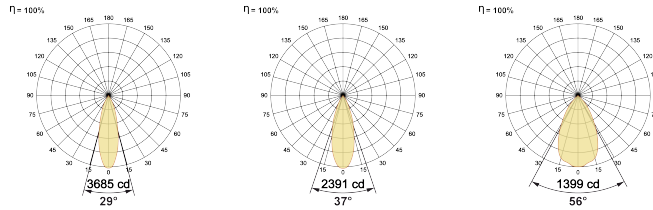

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/300mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Go Pro 35 M	12W	WW27K	CRI80	29°(MD)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL	
Go Pro 35 M	12W	1246	103	2700K	WW27K	CRI80	29°(MD)	White SWH	Non Dimmable On/Off
		1283	106	3000K	WW30K	CRI90	37°(WD)	Black SBL	Phase Dimmable PDIM
		1343	111	4000K	NW40K	56°(VWD)	Dali Dimmable DDIM		
		1367	113	5700K	CW57K		Bluetooth Dimmable BTTM		
					2700K-5700K	TW	Casambi CBTM		
					Warm to Dim	W2D			
Go Pro 35 M	12W			WW27K	CRI80	29°(MD)	SWH	On/Off	