

# Go Pro 35 P | 5W

## Product Reference

Environment Indoor

Installation Ceiling Suspended

## Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector Anodised

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Fixed

Tilt No

Swivel No

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Integral

LED Power Watts 3.4W




System Power Watts 4.2W

Operating Voltage  $V_{in}$  220-240 Vac

Power Factor p.f. > 0.5

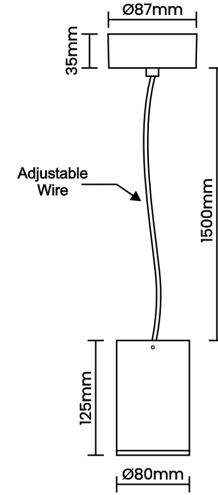

## Light Distribution



## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/130mA

## Controls

Standard Switchable On/Off

Optional DDIM,Non Dimmable

## Ordering Details

| Code Example: | Name               | Watt      | CCT          | CRI          | Angle          | Finish     | Control       |
|---------------|--------------------|-----------|--------------|--------------|----------------|------------|---------------|
|               | <b>Go Pro 35 P</b> | <b>5W</b> | <b>WW27K</b> | <b>CRI80</b> | <b>24°(MD)</b> | <b>SWH</b> | <b>On/Off</b> |

Select one from each column with highlighted values to create the ordering code

| NAME               | WATT      | LUMEN | EFFICACY | CCT          | CRI          | ANGLE          | FINISH     | CONTROL                                     |
|--------------------|-----------|-------|----------|--------------|--------------|----------------|------------|---|
| <b>Go Pro 35 P</b> | <b>5W</b> | 420   | 100      | 2700K        | <b>WW27K</b> | <b>CRI80</b>   | 24°(MD)    | White <b>SWH</b> Non Dimmable <b>On/Off</b> |
|                    |           | 433   | 103      | 3000K        | <b>WW30K</b> | CRI90          | 36°(WD)    | Black <b>SBL</b> Dali Dimmable <b>DDIM</b>  |
|                    |           | 454   | 108      | 4000K        | <b>NW40K</b> |                | 52°(VWD)   | Custom <b>CSM</b>                           |
|                    |           | 466   | 111      | 5700K        | <b>CW57K</b> |                |            |   |
| <b>Go Pro 35 P</b> | <b>5W</b> |       |          | <b>WW27K</b> | <b>CRI80</b> | <b>24°(MD)</b> | <b>SWH</b> | <b>On/Off</b>                               |

